

NOTES:


- Current Rating: 0.5A
- Voltage Rating: 50V AC/DC
- Contact Resistance: 50miliohm Max
- Insulation Resistance: 100Megohm Min
- Operation Temperature: -20°C to +105°C
- Housing Material: PA9T (UL94V-0)
- Cap. Material: LCP (UL94V-0)
- Contact Material: Phosphor Bronze
- Contact plating: Au or Sn over Ni

Ordering Information

3610-S XXXX - XXXX XX R 01

No. of Pins Housing High Contact Plating
 G1=Sn Gold G2=Sn Gold
 S1=Sn Gold/Fm S2=Sn Gold/Fm
 T=Tube P=Tube+CAP
 R=Tube+Rest+CAP

ASSY HIGH(H)	PLUG(H1)	SOCKET(H2)
4.00	1.00	3.00
4.50	1.50	3.00
5.00	2.00	3.00
5.50	1.50	4.00
6.00	2.00	4.00
6.50	2.00	4.50
7.00	3.00	4.00
7.50	3.00	4.50
8.00	4.00	4.00

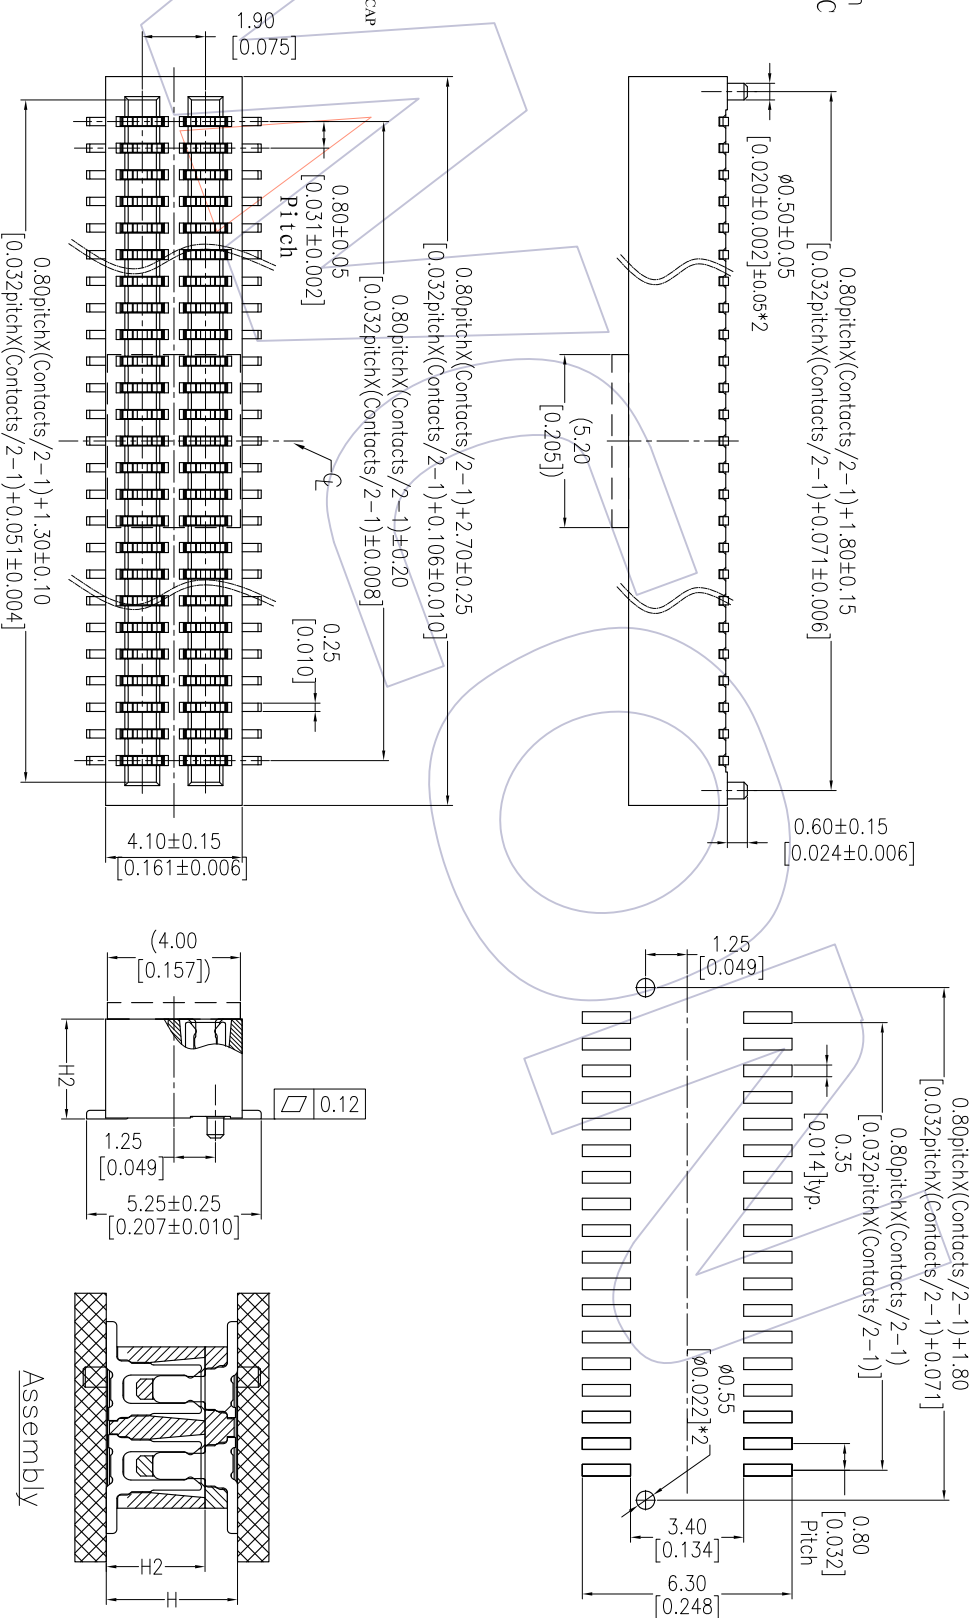

Assembly

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
A0	2012/11/02	NEW		XX	TsingSn	2012/11/02	mm	A4	3610-SXXX-XXXXXR01	0.80mm B TO B FEMALE 180° SMT TYPE	Tel: +86 769 85358920	Tel: +86 512 57468408
				XX	CHECK	DATE	inch	1/1			Fax: +86 769 85358915	Fax: +86 512 57468468
				X.XXX	APPROVE	DATE	SHEET				E-mail: sales@wcon.com	E-mail: sales@wcon.com
				Angle	PROJ.							
				± 3'								
				DIM								
				TOL								



Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com