

HSF

NOTES:

Current Rating: 0.5AMP
 Contact Resistance: 80mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 500MΩ Min
 Operation Temperature: -55°C to +85°C





Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT UL94V-0
 Shell: Zinc Alloy

Ordering Information

6321-0XXX S D XX MNT 01

No. of Pins
 14P
 20P
 26P
 36P
 50P
 68P
 100P

Contact Plating
 S1=3μ"Gold/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin

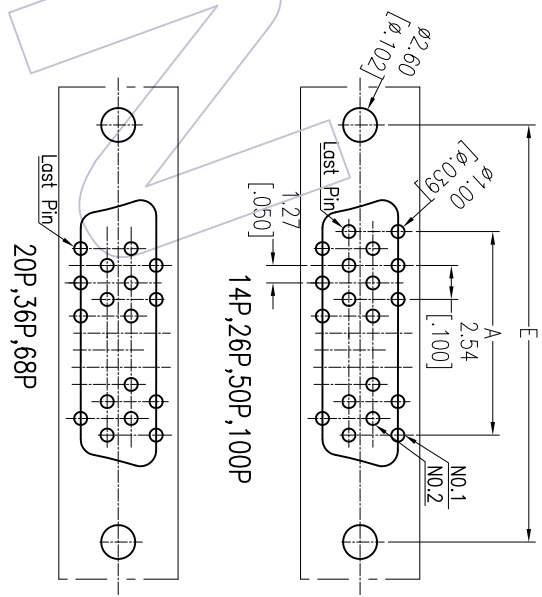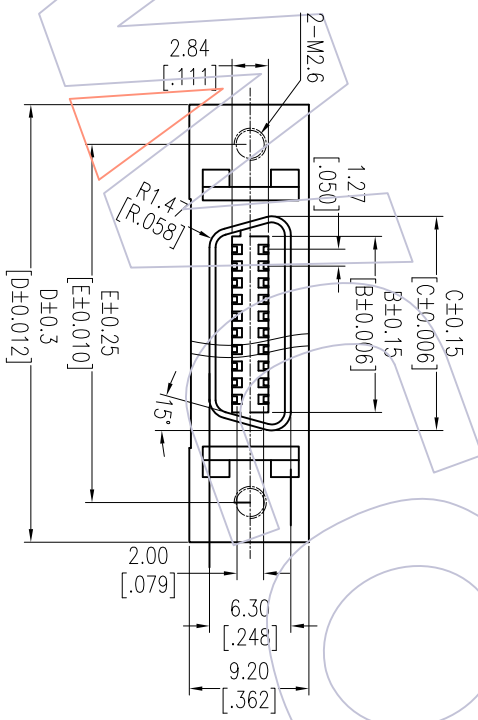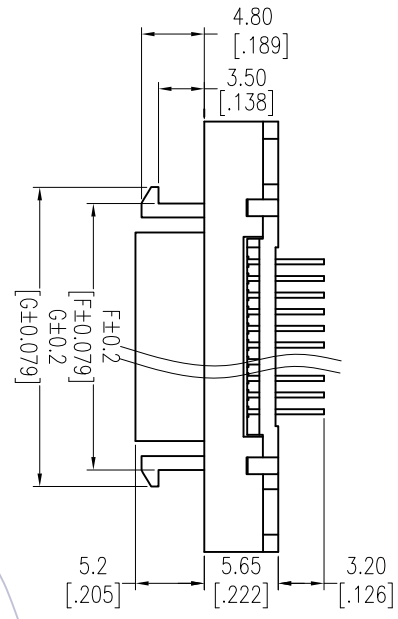

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

No. of Pin	DIM						
	A	B	C	D	E	F	G
14	7.62	9.52	12.6	29.51	23.64	17.25	19.58
20	10.16	13.1	16.43	33.32	27.45	21.06	23.39
26	15.24	17.1	20.24	37.13	31.26	24.76	27.2
36	20.32	23.4	26.5	43.48	37.61	31.11	33.55
50	30.48	32.29	35.39	52.37	46.5	40.0	42.44

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX	JYhuang	2013/05/15	UNIT	mm	6321-0XXSDXXMNT01
XX	CHECK	DATE	SIZE	A4	TITLE: SCSI FEMALE 180° DIP
X.XXX	±0.15	DATE	SHEET	1/1	Customer NO.
Angle	± 3'	DATE	PROJ.		
APPROVE	APPROVE	DATE			
CHANGE	CHANGE				
MODIFICATION DESCRIPTION					
NEW					
2013/05/15					
DATE					
REV					