

HSF

NOTES:

Current Rating: 0.5AMP
 Contact Resistance: 35mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 500MΩ Min
 Operation Temperature: -65°C to +125°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0


Ordering Information

6322D-XXX S I XX PN A 01

No. of Pins
 26 50
 34 60
 40 68

Contact Plating
 S1=3u"Gold/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin

Packing
 A=Tray
 T=Tube

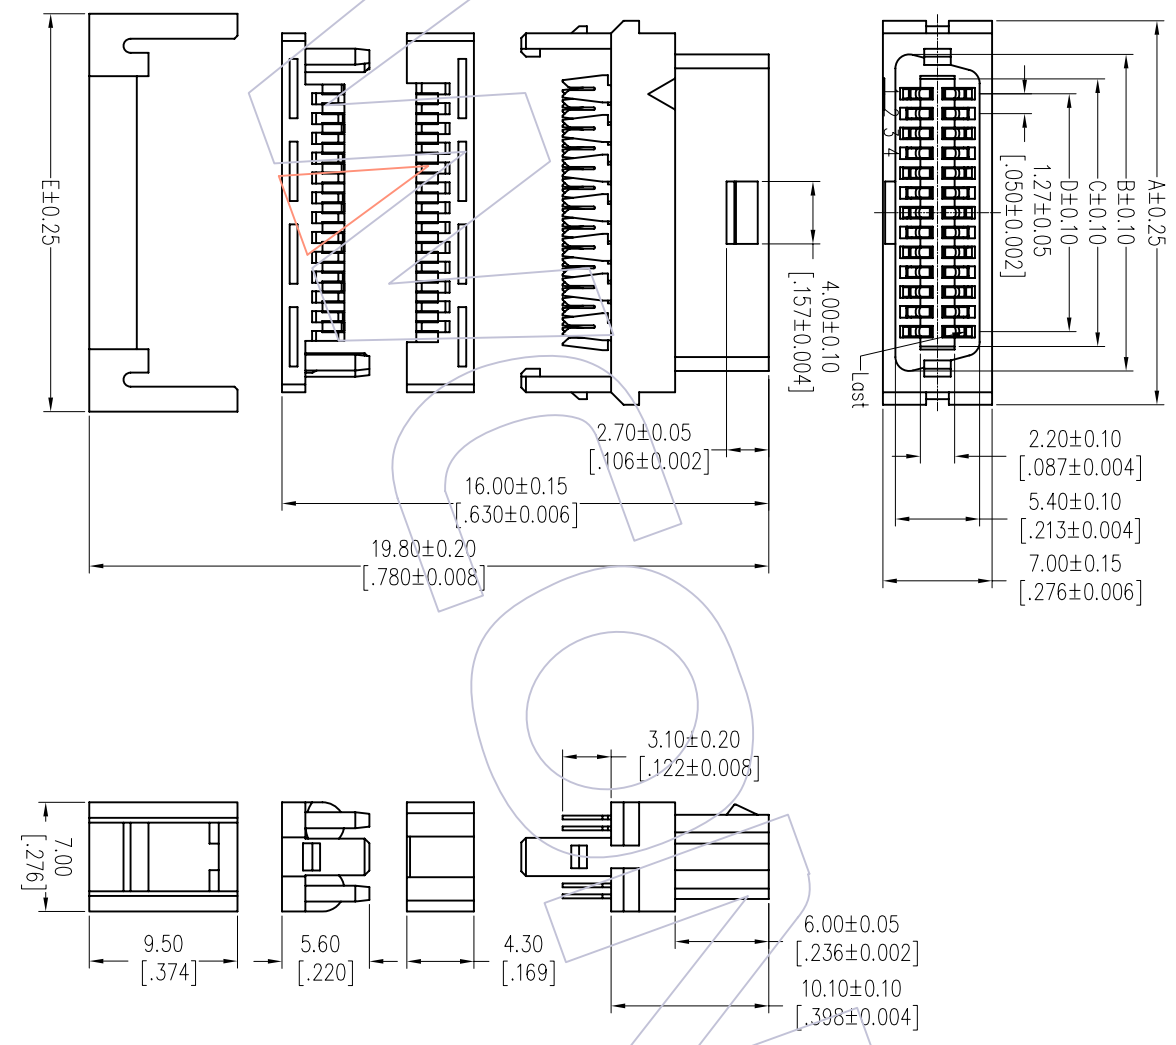

Item	Pitch	Mating
Standard	1.27	6320D
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE DIM	TOL	APPROVE	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
A0	2012/11/13	NEW		± .3°		2012/11/13	A4	1/1	6322D-XXXS1XXPN A01	1.27mm SCST SOCKET IDC TYPE CEN-TYPE, FOUR PARTS	Http: www.wcon.com	
					CHECK	DATE	UNIT	mm		Customer NO.	Tel: +86 769 85358920	Tel: +86 512 57468408
					OPERATION	DATE	SIZE	A4			Fax: +86 769 85358915	Fax: +86 512 57468468
					ANGLE	DATE	SHEET	1/1			E-mail: sales@wcon.com	E-mail: sales@wcon.com
					DRAW	DATE	PROJ.					
					JYHuang	2012/11/13						

No. of Pins	Dimension				
	A	B	C	D	E
26	24.60	20.29	17.14	15.24	25.49
34	29.68	25.37	22.22	20.32	30.57
40	33.49	29.18	26.03	24.13	34.38
50	39.84	35.53	32.38	30.48	40.73
60	46.19	41.88	38.73	36.83	47.08
68	51.27	46.96	43.81	41.91	52.16

WCON

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com