

HSF

NOTES:




Current Rating: 1.0A AMP
Contact Resistance: 20milliohm Max
Withstand Voltage: 500V AC/Minute
Insulation Resistance: 1000Megohm Min
Operation Temperature: -40°C to +105°C
Housing Material: PBT+30%GF(UL94V-0)
Contact Material: Copper alloy
Contact plating: Au/Sn over Ni Plating

Ordering Information

5260-XX B P XX B W A 1

No. of Pins: 10-60P
Type: A=With Clapboard B=Without Clapboard
Contact Plating: S0=Gold Flash/Ni S1=3u"Gold/Ni S2=5u"Gold/Ni S3=10u"Gold/Ni S4=15u"Gold/Ni S5=30u"Gold/Ni
Color: B=Black U=Blue G=Grey(427C)
Packing: A=Tray T=Tube

SR P/N: G5260-XXCAB01

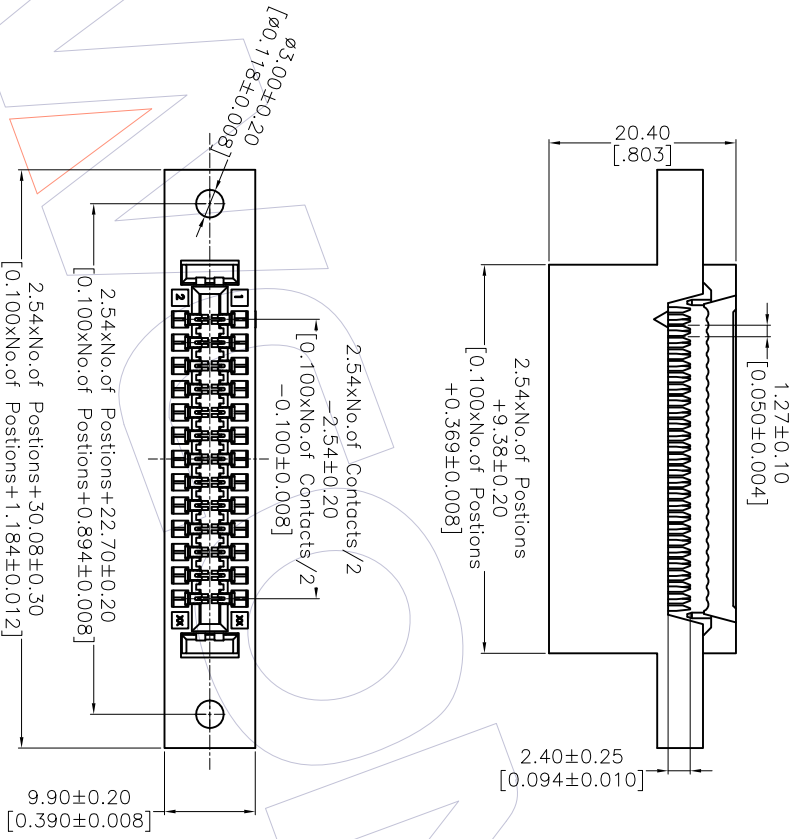

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW		SCALE		PART NO.		TITLE		WCON - Dongguan		WCON - Kunshan	
				X.X	±0.40	HYH	DATE	1:1	mm	5260-XXBPXXBW A1	2.54mm Card Edge Connector	Tel: +86 769 85358920	E-mail: sales@wcon.com	Tel: +86 512 57468408	E-mail: sales@wcon.com		
A1	2013.07.16	Add SR Parts	YSH	X.XX	±0.25	CHECK	DATE	A4	1/1	Customer NO.	WCON - Dongguan		WCON - Kunshan				
A0	2011.12.20	NEW	-	X.XXX	±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.	Tel: +86 769 85358915		Tel: +86 512 57468468				
				Angle	± 3'			PROJ.			E-mail: sales@wcon.com		E-mail: sales@wcon.com				
				DIM	TOL						Http: www.wcon.com						

WCON

Http: www.wcon.com

WCON - Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON - Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com