

# HSF





### NOTES:

- Rated Current: 3.0A
- Rated Voltage: 250V AC/DC
- Contact Resistance: 20mΩ max
- Withstand Voltage: 1000V AC/Minute
- Insulation Resistance: 1000MΩ min
- Operation Temperature: -25°C to +85°C
- Contact Material: Brass
- Contact plating: Au Or Sn Over Ni
- Insulator Material: PBT+30G.F (UL94V-0)

## Ordering Information

### WF2548 -1 WS XX X 0 1

- No. of Rows Single Row
- No. of pins See List
- Contact Plating
  - S0=Gold Flash/Tin
  - S3=10u"Gold/Tin
  - S4=15u"Gold/Tin
  - S5=30u"Gold/Tin
- Color
  - B=Black
  - E=Beige
  - W=White
- Packing
  - 0=PE Bag
  - T=Tube
- Blank=Tin
- G0=Gold Flash
- G3=10u"Gold
- G4=15u"Gold
- G5=30u"Gold

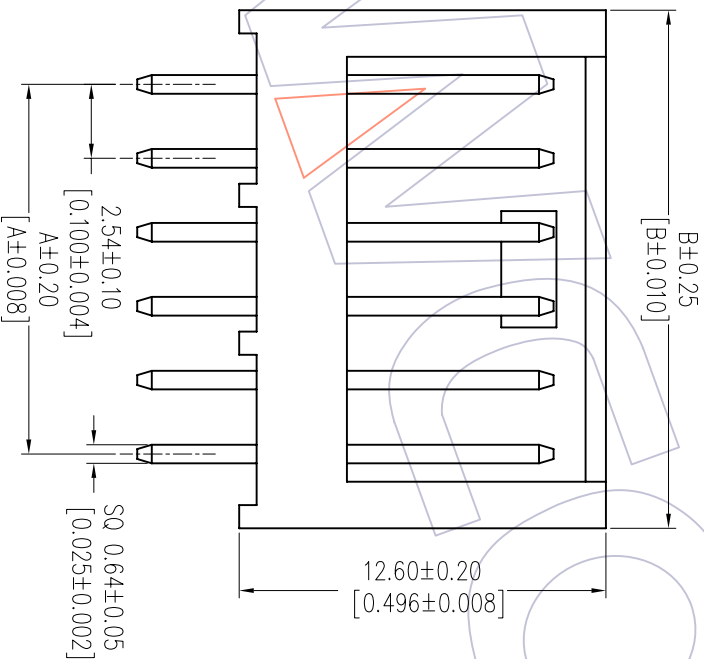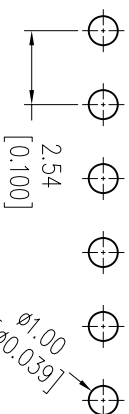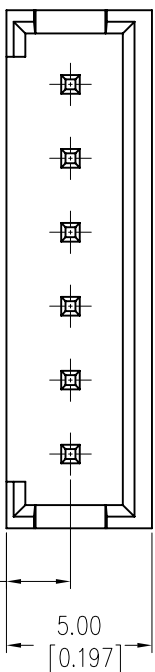

Circuit	Dimension	
	A	B
1×02	2.54	7.70
1×04	7.62	12.70
1×06	12.70	17.80
1×08	17.78	22.90
1×09	20.32	25.40
1×10	22.86	28.00
1×12	27.94	33.10
1×15	35.56	40.70
1×22	53.34	58.50

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/09/08	NEW	

OPERATION	DRAW	DATE	SCALE	FIT
X.X	JYHuang	2012/09/08	UNIT	mm
X.XX	CHECK	DATE	SIZE	A4
X.XXX	APPROVE	DATE	SHEET	1/1
Angle			PROJ.	
± 3'				
DIM				
TOL				

PART NO.	SEE TAB
TITLE:	2.54 SINGLE ROW 180° DIP WAFER
CUSTOMER NO.	

**WCON**

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com

WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com