



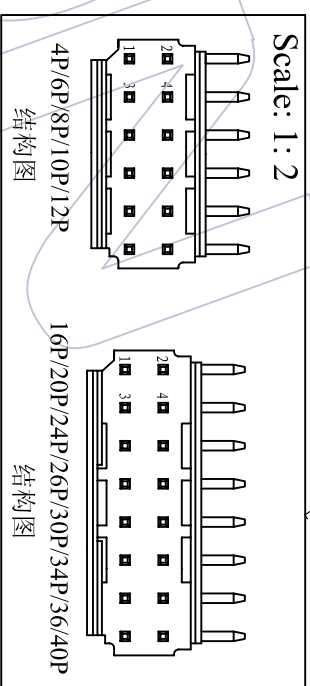

NOTES:

Rated Current:3A
 Rated Voltage:250V AC/DC
 Contact Resistance:20mΩ max
 Withstand Voltage:1000V AC/Minute
 Insulation Resistance:1000MΩ min
 Operation Temperature:-25℃ to+85℃

Contact Material:Brass
 Contact Plating:Sn over Ni
 Insulator Material:PA66+15%GF(UL94V-0)

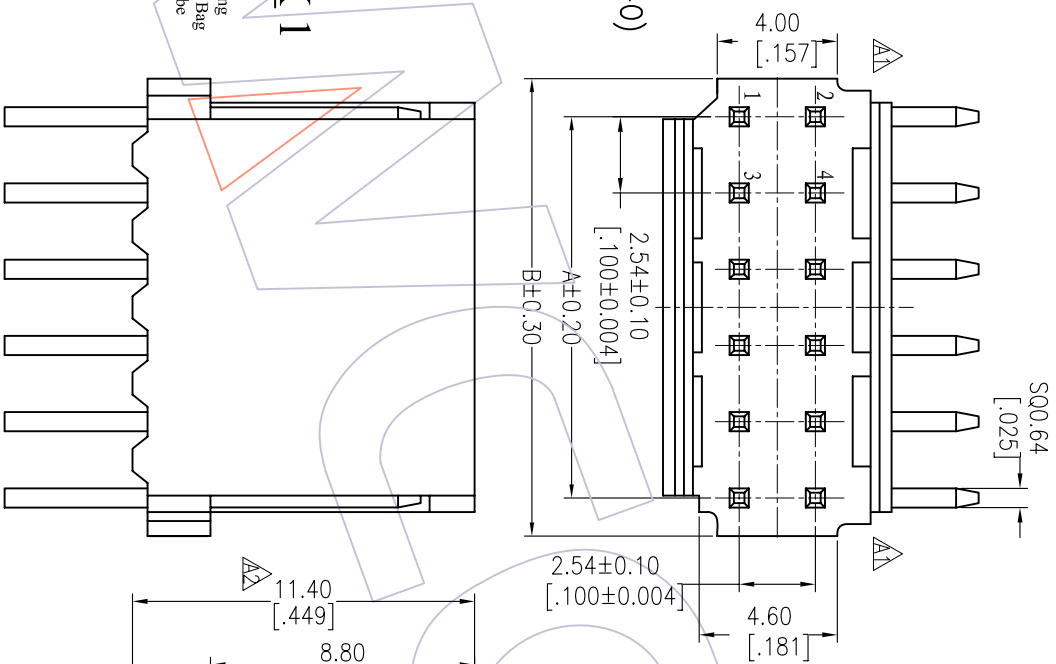

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Ordering Information

WF2547 -2 WR XX X X 1

No.of Row Dual Row
 No.of pins 02P~20P
 Color U=Blue W=White B=Black
 Packing 0=PE Bag T=Tube

Dimensional & Ordering Information

| Circuit | Part No. | Dimension | |
|---------|-----------------|-----------|-------|
| | | A | B |
| 2x02 | WF2547-2WR02XX1 | 2.54 | 5.08 |
| 2x03 | WF2547-2WR03XX1 | 5.08 | 7.62 |
| 2x04 | WF2547-2WR04XX1 | 7.62 | 10.16 |
| 2x05 | WF2547-2WR05XX1 | 10.16 | 12.70 |
| 2x06 | WF2547-2WR06XX1 | 12.70 | 15.24 |
| 2x08 | WF2547-2WR08XX1 | 17.78 | 20.32 |
| 2x10 | WF2547-2WR10XX1 | 22.86 | 25.40 |
| 2x12 | WF2547-2WR12XX1 | 27.94 | 30.48 |
| 2x13 | WF2547-2WR13XX1 | 30.48 | 33.02 |
| 2x15 | WF2547-2WR15XX1 | 35.56 | 38.10 |
| 2x17 | WF2547-2WR17XX1 | 40.64 | 43.18 |
| 2x18 | WF2547-2WR18XX1 | 43.18 | 45.72 |
| 2x20 | WF2547-2WR20XX1 | 48.26 | 50.80 |

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | APPROVE | OPERATION | | DRAW | SCALE | Fit | PART NO. | TITLE: | |
|-----|----------|--------------------------|--------|---------|-----------|-------|----------|----------|-----|----------|--------|--------------|
| | | | | | Angle | DIM | | | | | | DESIGN |
| A2 | 11/04/28 | Modify Drawing tolerance | | | X.X | ±0.40 | Cany Liu | 11/04/28 | mm | A4 | 1/1 | Customer NO. |
| A1 | 09/09/15 | Modify Drawing | | | X.XX | ±0.25 | | | | | | |
| A0 | 09/06/29 | NEW | | | X.XXX | ±0.15 | | | | | | |

SBE TAB

2.54 WAFER 90° DUAL ROW(TYCO TYP.)