

HSF


NOTES:

Rating Voltage: 125V AC/DC
 Current Rating: 1.0AMP
 Contact Resistance: 20mΩ max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 100MΩ min
 Operation Temperature: -25°C to +85°C
 Contact Material: Brass
 Contact plating: Au Or Sn Over Ni
 Insulator Material: PA6T+30%GF UL94V-0

Ordering Information

WF1254 - WZ XX XX 1

No. of pins Contact Plating Color Packing
 02-15P S0=Gold Flash/Tin B=Black A=Tray
 S3=10u"Gold/Tin W=White T=Tube
 S4=15u"Gold/Tin S5=50u"Gold/Tin R=Reel
 G0=Gold Flash G3=10u"Gold
 G4=15u"Gold G5=30u"Gold
 Blank=Tin

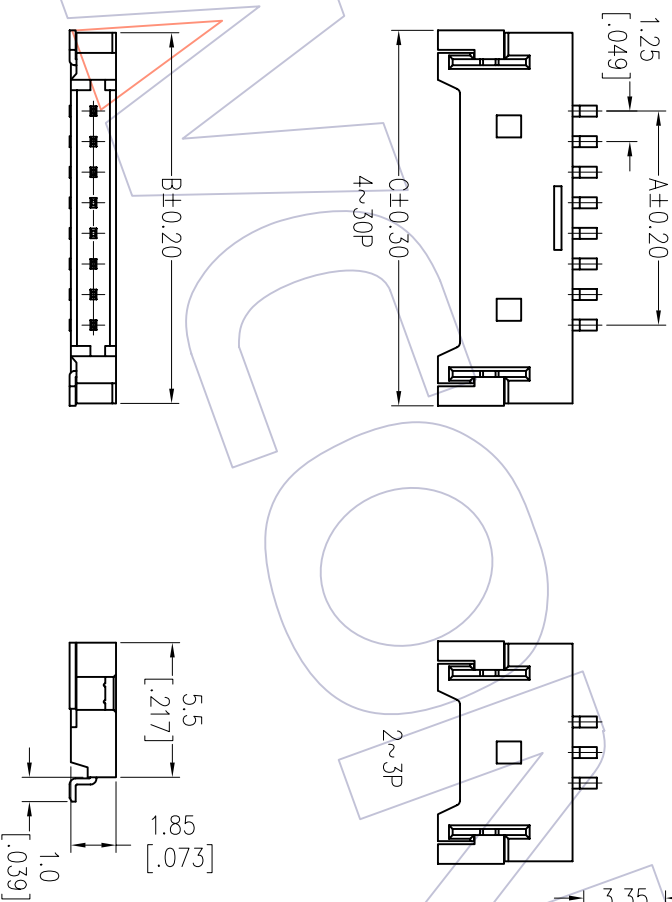

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Specification & Ordering Information:

Circuit	Part No.	Dimension			Q'ty /Reel
		A	B	C	
02	WF1254-WZ02XR1	1.25	7.65	7.85	2,000
03	WF1254-WZ03XR1	2.50	8.90	9.10	2,000
04	WF1254-WZ04XR1	3.75	10.15	10.35	2,000
05	WF1254-WZ05XR1	5.00	11.40	11.60	2,000
06	WF1254-WZ06XR1	6.25	12.65	12.85	2,000
07	WF1254-WZ07XR1	7.50	13.90	14.10	2,000
08	WF1254-WZ08XR1	8.75	15.15	15.35	2,000
09	WF1254-WZ09XR1	10.00	16.40	16.60	2,000
10	WF1254-WZ10XR1	11.25	17.65	17.85	2,000
11	WF1254-WZ11XR1	12.50	18.90	19.10	2,000
12	WF1254-WZ12XR1	13.75	20.15	20.35	2,000
13	WF1254-WZ13XR1	15.00	21.40	21.60	2,000
14	WF1254-WZ14XR1	16.25	22.65	22.85	2,000
15	WF1254-WZ15XR1	17.50	23.90	24.10	2,000
16	WF1254-WZ16XR1	18.75	25.15	25.35	2,000
17	WF1254-WZ17XR1	20.00	26.40	26.60	2,000
18	WF1254-WZ18XR1	21.25	27.65	27.85	2,000
19	WF1254-WZ19XR1	22.50	28.90	29.10	2,000
20	WF1254-WZ20XR1	23.75	30.15	30.35	2,000
30	WF1254-WZ30XR1	36.25	42.65	42.85	2,000

PART NO. SEE TAB

TITLE: "M"TYPE 1.25 Wafer 90° DIP

CUSTOMER NO.

WCON

Http: www.wcon.com

WCON-Dongguan

WCON-Kunshan

Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: sales@wcon.com

OPERATION	SCALE	FIT
XX ±0.40	UNIT mm	1/1
XXX ±0.25	SIZE A4	
XXX ±0.15	SHEET 1/1	
Angle ± 3°	PROJ. 1st	

DRAW	DATE	SCALE	FIT
JYHuang	2012/09/01	UNIT mm	1/1
CHECK	DATE	SIZE A4	
APPROVE	DATE	SHEET 1/1	

CHANGE	DESCRIPTION

REV	DATE	MODIFICATION DESCRIPTION
AO	2012/09/01	NEW