HSF

NOTES:
Current Rating: 3.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: −55℃ to +105℃

Contact Material:Phosphor Bronze/Brass
Contact plating:Au Or Sn over Ni
Insulator Material:PBT+30%G.F UL94V-0
Sheel:Cold Roller Steel,Ni Plated
Nut:Brass,Sn over Ni Plated

Ordering Information

6224- XX M N XX X 0 X

No.of Pins	Contact Plating	Insulator Color	Screw
09,15,25,37P	S0=Gold Flash/Tin	B:Black	1=Without Screw (three part)
	S3=10u"Gold/Tin	U:Blue	2=With Screw (three part)
	S4=15u"Gold/Tin		3=Without Screw (two part)
	S5=30u"Gold/Tin		4=With Screw (two part)
	SN=Tin		

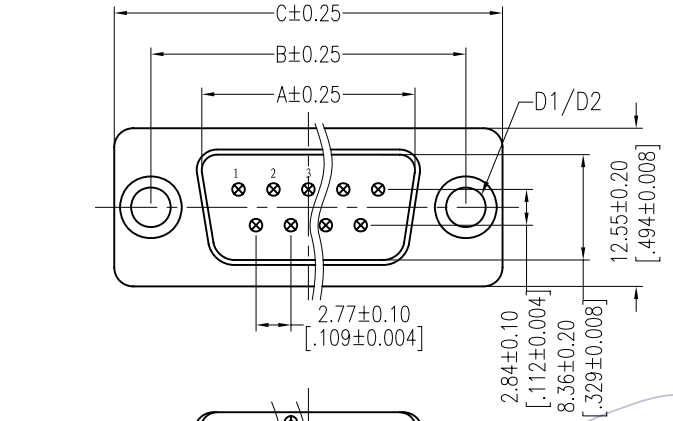



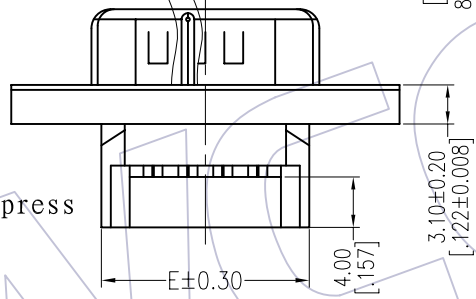



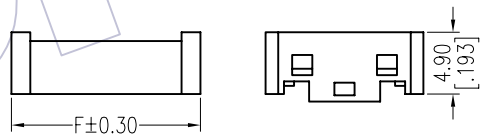

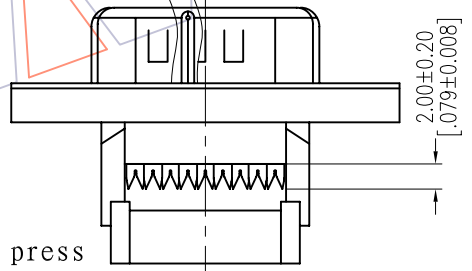

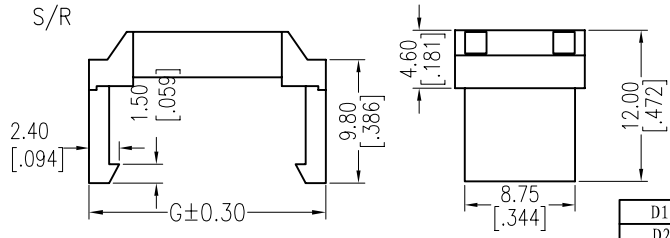

D1	6224-XXMNXXX01/3
D2	6224-XXMNXXX02/4

No. of Positions	DIM "A"	DIM "B"	DIM "C"	DIM "D1"	DIM "D2"	DIM "E"	DIM "F"	DIM "G"
09	16.92	24.99	30.81	Without Screw Ø3.15	With Screw #4-40	16.50	15.00	18.80
15	25.25	33.32	39.14			24.80	23.30	26.90
25	38.96	47.04	53.04			38.60	37.00	40.50
37	55.42	63.50	69.32			55.20	53.70	57.20

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/12/06	NEW	------

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	JYHuang	DATE	2012/12/06
CHECK		DATE	
APPROVE		DATE	

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. SEE TABLE

TITLE: D-SUB MALE DUAL ROW IDC TYPE

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com