HSF

NOTES:
Current Rating:1AMP
Contact Resistance:35mΩ max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ min
Operation Temperature:−55℃ to +85℃

Contact Material:Phosphor Bronze
Contact plating:Au or Sn over Ni
Shell Material:SPCC,t=0.50mm
Housing Material:PBT+30%GF(UL94V−0)
Cover Material:LCP+30%GF(UL94V−0)

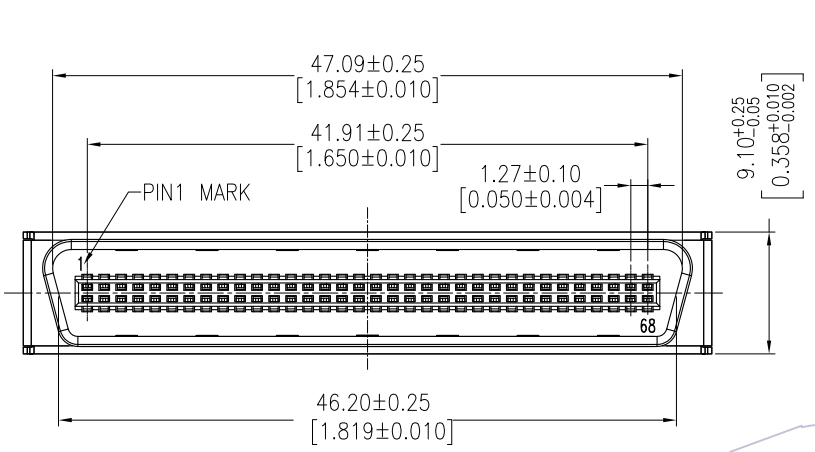

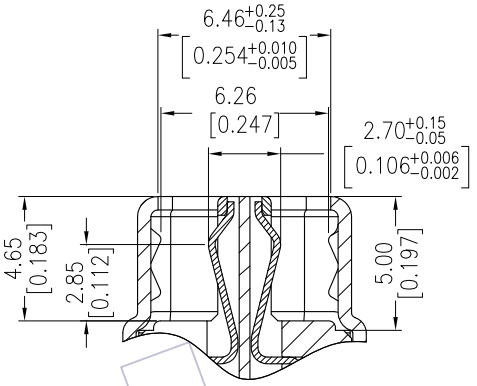

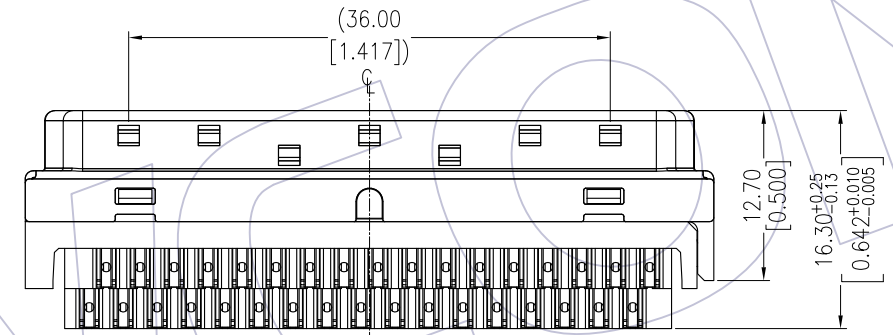

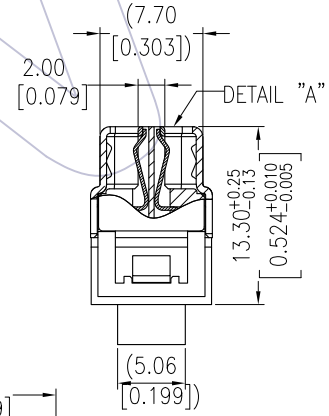

Ordering Information

6320 - 068 S S XX M N A 01

No.of Pins	Contact Plating	Packing
68Pin	S4=15u"Gold/Tin	A=Tray
	S5=30u"Gold/Tin	



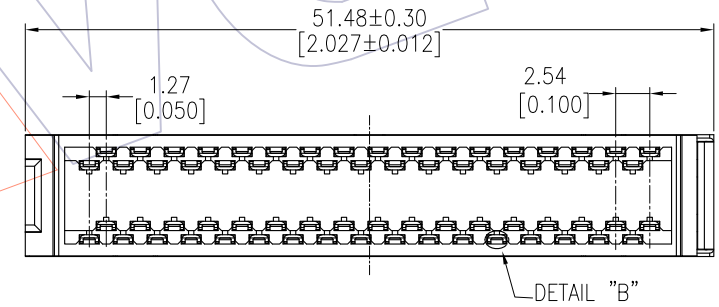



REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/12/20	NEW	——

OPERATION		DRAW	DATE	SCALE	FIT
X.X	±0.40	Tsingsn	2012/12/20	UNIT	mm / inch
X.XX	±0.25	CHECK	DATE	SIZE	A4
X.XXX	±0.15			SHEET	1/1
Angle	± 3°	APPROVE	DATE	PROJ.	
DIM	TOL				

PART NO. 6320-068SSXXMNA01

TITLE: 1.27mm SCSI 68P Female (Soldering Type)

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com