

# HSF


NOTES:  
 Current Rating: 3.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass/Phosphor Bronze  
 Contact plating: Au Or Sn over Ni  
 Insulator Material: PBT+30%G.F UL94V-0

## Ordering Information

5310-XX X XX X 02

- |             |                  |                  |                 |
|-------------|------------------|------------------|-----------------|
| No. of Pins | Contact Material | Contact Plating  | Color Insulator |
| 06 30       | B=Brass          | S0=Gold Flash/Ni | B=Black         |
| 08 34       | P=Phosphor       | S3=10u"Gold/Ni   | G=Grey(427C)    |
| 10 36       | Bronze           | S4=15u"Gold/Ni   | E=Grey(413C)    |
| 14 40       |                  | S5=30u"Gold/Ni   |                 |
| 16 50       |                  | SN=Tin           |                 |
| 20 60       |                  | SM=Matte Tin     |                 |
| 24 64       |                  |                  |                 |
| 26          |                  |                  |                 |

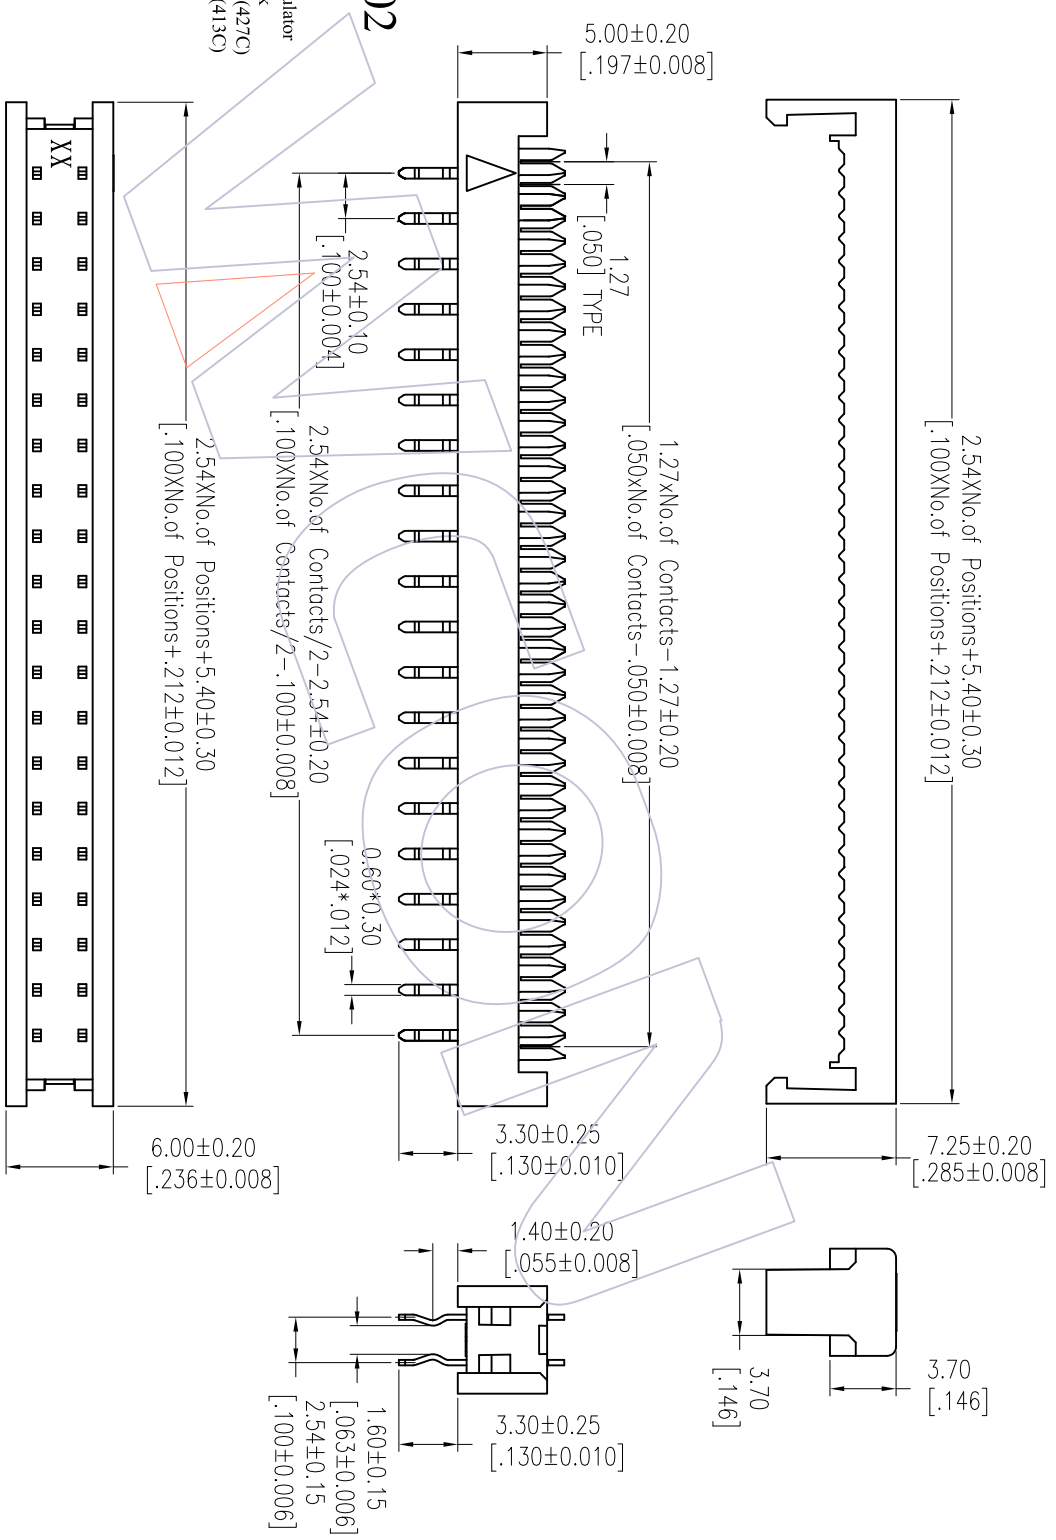

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE: 2.54 DIP PLUG CONNECTOR KINK-PLN	Customer NO.	WCON-Dongguan Http: www.wcon.com WCON-Kunshan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
A0	2014/05/26	NEW	---	X.XX	JYHuang	2014/05/26	mm	A4	5310-XXXXXX02			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	Customer NO.	WCON-Dongguan Http: www.wcon.com WCON-Kunshan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com

# WCON