

HSF

NOTES:



Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%G.F UL94V-0 (Std)
 Or PBT+30%G.F UL94V-0

Ordering Information

3110-XX S XX B K00 XX X

No. of Pins	Contact Plating	Color Insulator	Packaging
6P 24P	G0=Gold Flash	B=Black	A=Tray
8P 24P	G3=10%Gold	U=Blue	T=Tube
10P 30P	G4=15%Gold	G=Gray(427C)	
12P 34P	G5=30%Gold	E=Gray(413C)	
14P 40P	S0=Gold Flash/Tin		
16P 50P	S3=10%Gold/Tin		
18P 60P	S4=15%Gold/Tin		
20P 64P	S5=30%Gold/Tin		
	SN=Tin		

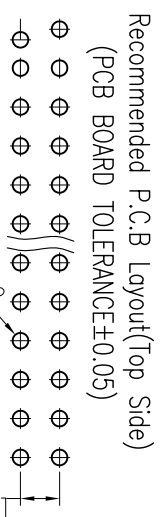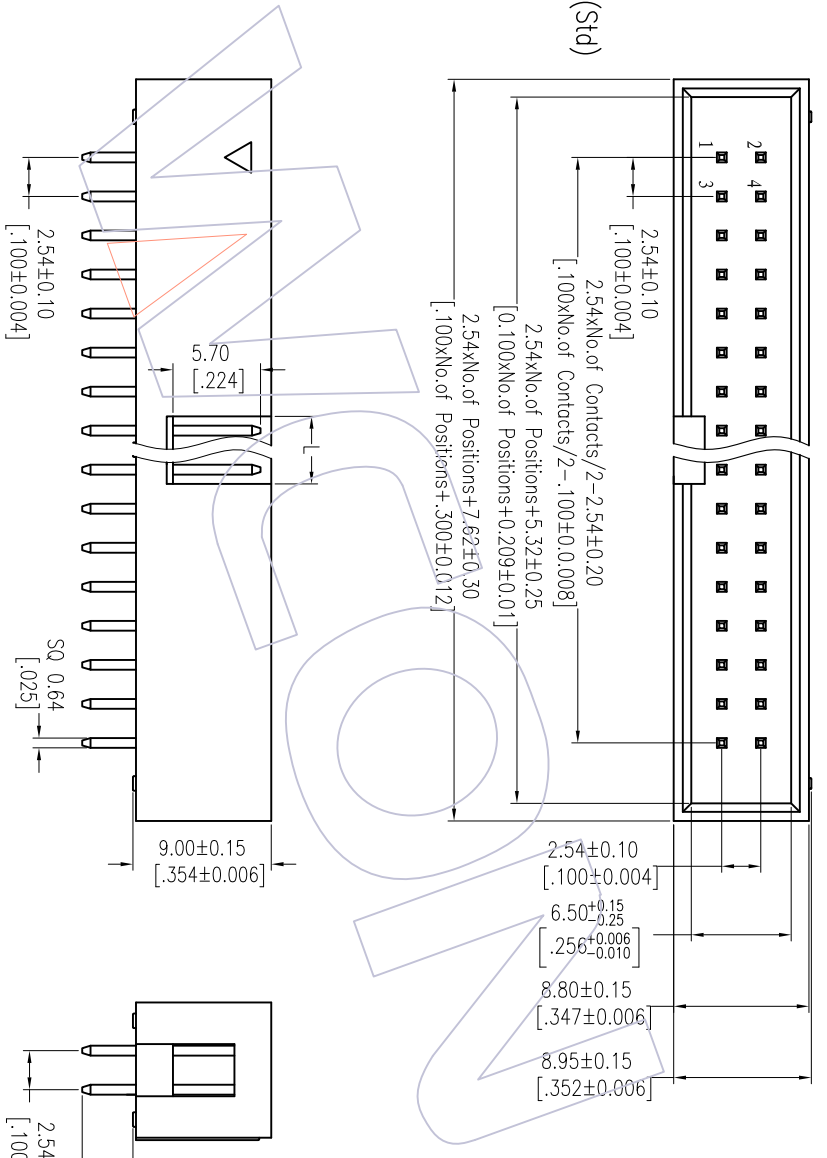

Item	Pitch	Mating
Standard	2.54	5212/2185
Alternate		

NO. Pin	STANDARD(A)	L
6P-8P		4.00
10P-64P	3.3mm	4.40

OPERATION		DRAW		DATE		SCALE		FIT		PART NO.	
X.X		JYHuang		2012/09/25		UNIT		mm		3110-XXSXXBK00XX	
X.XXX		CHECK		DATE		SIZE		A4		TITLE:	
X.XXX		X.XXX		± 0.15		SHEET		1/1		2.54 BOX HEADER 180° H=9.0	
Angle		APPROVE		DATE		PROJ.		Customer NO.			
DIM		TOL									
CHANGE		DESCRIPTION									
REV		DATE		MODIFICATION		DESCRIPTION					
A0		2012/09/25		NEW							
REV		DATE		MODIFICATION		DESCRIPTION					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com

WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com