

HSF

NOTES:


- Current Rating: 3.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Voltage: 1000V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact plating: Au Or Sn over Ni
- Insulator Material: PA9T+30%G.F UL94V-0

Ordering Information



3110-XX M XX B D00 X 1

- No.of Pins: 6P 24P 8P 26P 10P 30P 12P 34P 14P 40P 16P 50P 18P 60P 20P 64P
- Contact Plating: G=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold
- Color Insulator: B=Black, G=Gray(427C), E=Gray(413C)
- Packing: T=Tube, P=Tube+CAP, R=Tube&Recit+CAP
- S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin

| Item | Pitch | Mating |
|-----------|-------|-----------|
| Standard | 2.54 | 5212/2185 |
| Alternate | | |

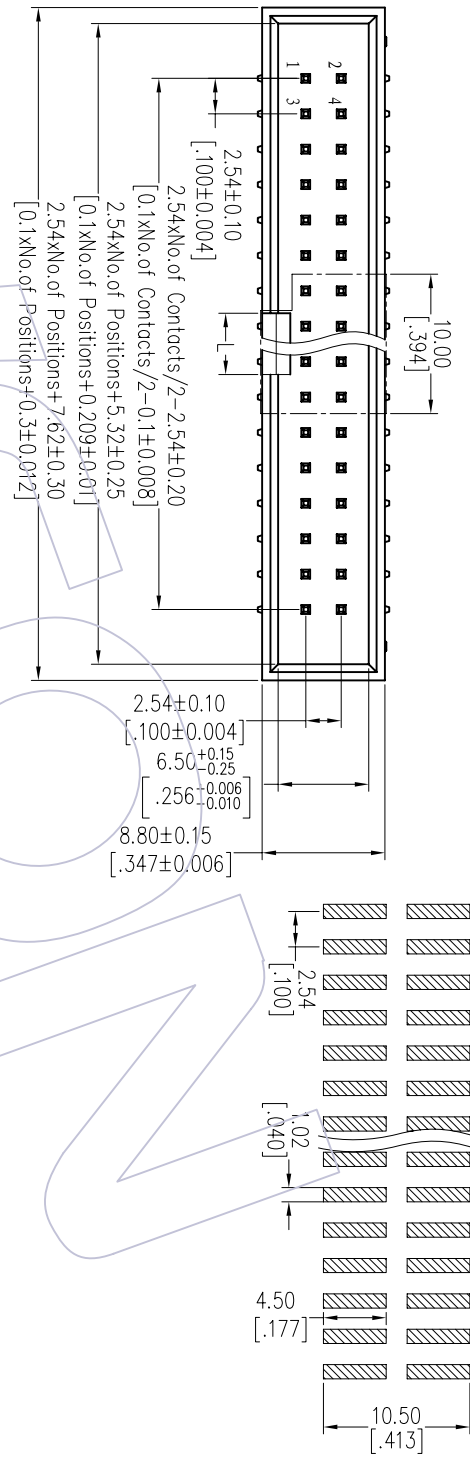

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

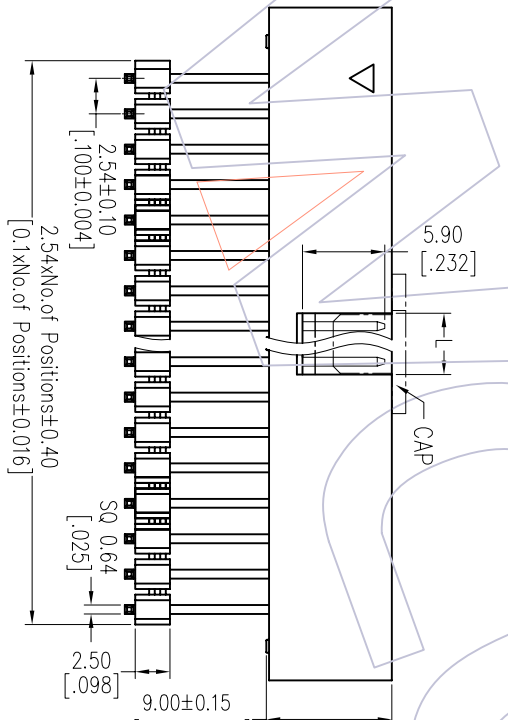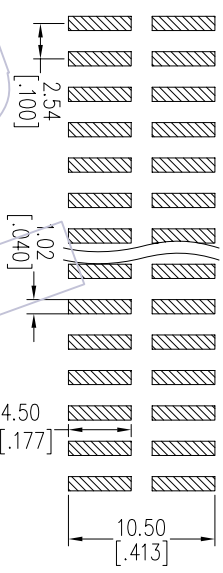

| ITEM | W | C | L |
|-----------|------|---|------------|
| Standard | 9.50 | | 6-8P=4.0 |
| Alternate | | | 10-64P=4.4 |

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE |
|-----|------------|--------------------------|--------|
| A0 | 2012/09/25 | NEW | |

| OPERATION | DRAW | DATE | SCALE | FIT | PART NO. |
|-----------|---------|------------|-------|-------|--|
| XX | JYHuog | 2012/09/25 | mm | | 3110-XXMXXBD00X1 |
| CHECK | CHECK | DATE | SIZE | SHEET | TITLE: |
| X.XXX | | | A4 | 1/1 | 2.54 BOX HEADER SWT H=9.0 ADD HOUSING |
| APPROVE | APPROVE | DATE | PROJ. | PROJ. | Customer NO. |
| | | | | | |

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com

WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com