

HSF

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:
 Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: LCP+30%G.F UL94V-0


Ordering Information

3221-XX M XX B S T 1

- | | | | |
|-------------|-------------------|-----------------|---------|
| No. of Pins | Contact Plating | Insulator Color | Packing |
| 06 30 | G0=Gold Flash | B=Black | T=Tube |
| 08 34 | G3=10u"Gold | U=Blue | |
| 10 40 | G4=15u"Gold | C=Grey(42°C) | |
| 14 44 | G5=30u"Gold | E=Grey(413°C) | |
| 16 50 | S0=Gold Flash/Tin | | |
| 20 60 | S3=10u"Gold/Tin | | |
| 24 64 | S4=15u"Gold/Tin | | |
| 26 | S5=30u"Gold/Tin | | |
| | SN=Tin | | |

Item	Pitch	Mating
Standard	2.00	5225
Alternate		

REV	DATE	MODIFICATION DESCRIPTION
A0	2012/10/06	NEW

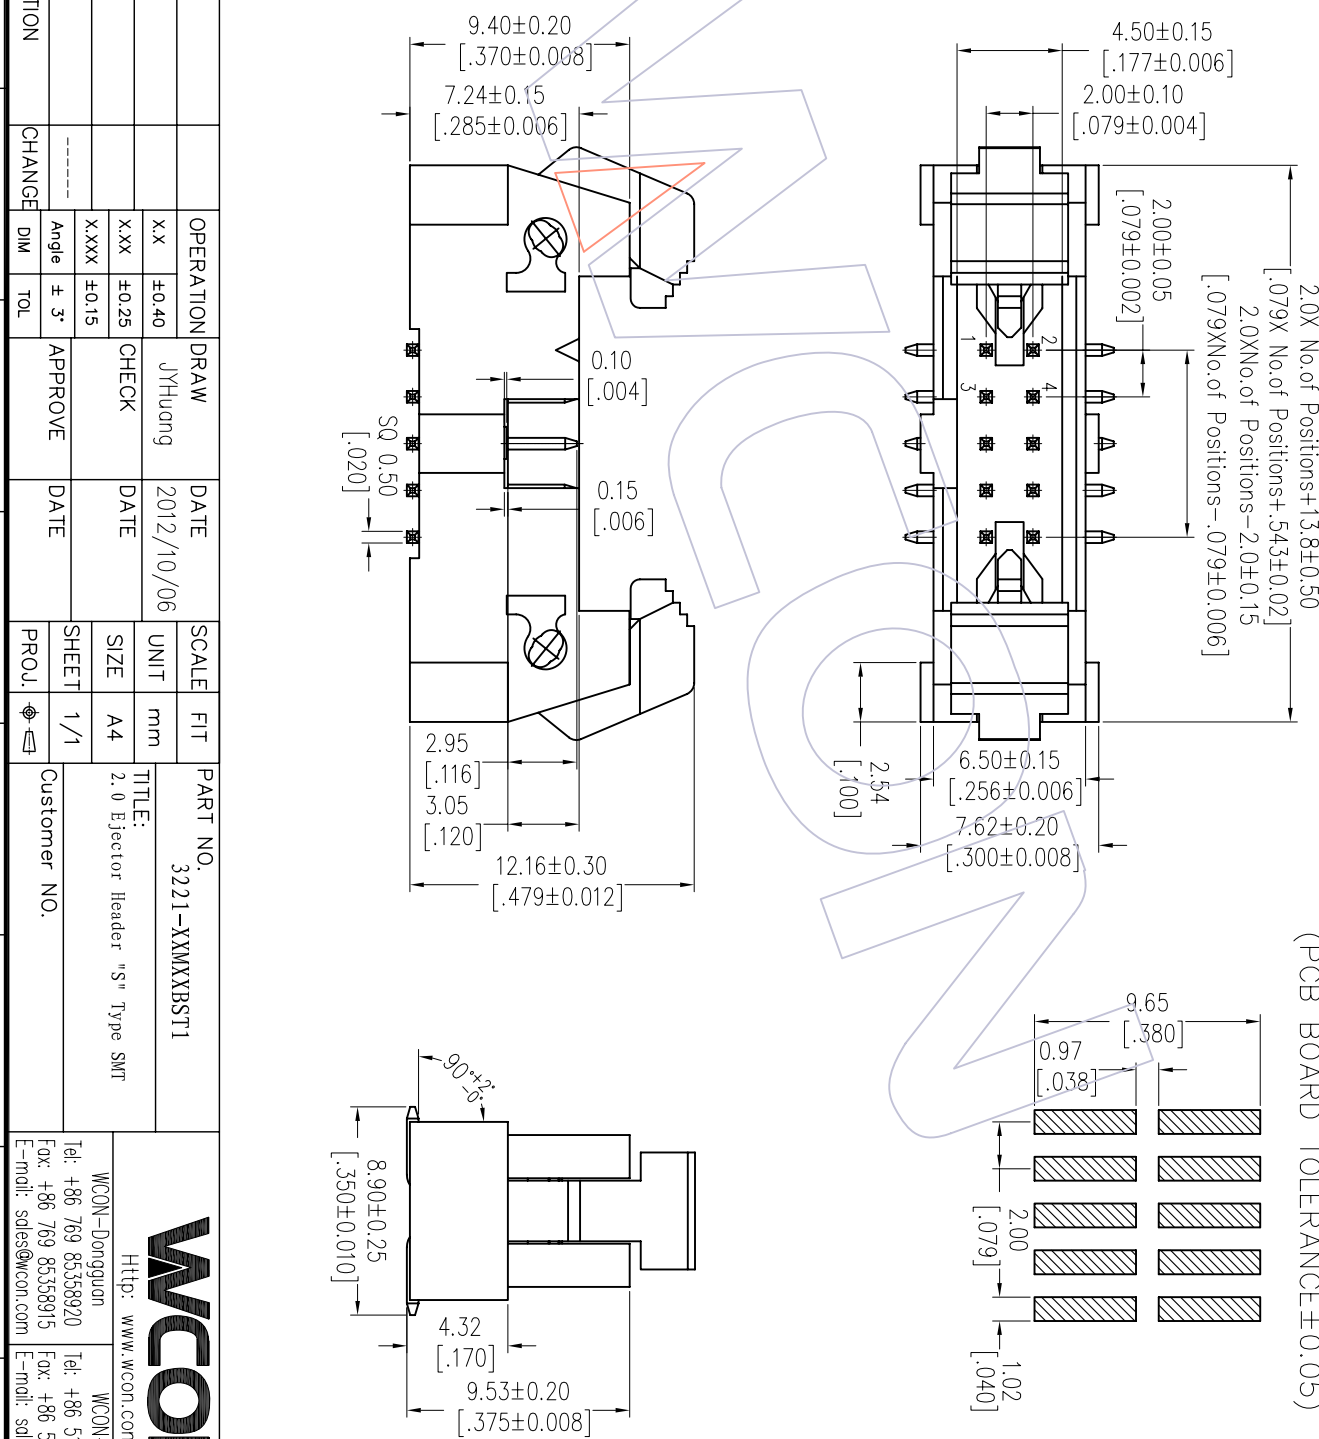

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX	JYHuog	2012/10/06	UNIT	mm	3221-XXMXXBST1
XX	CHECK	DATE	SIZE	A4	TITLE:
X.XXX	±0.15	± 3'	APPROVE	DATE	2.0 Ejector Header "S" Type SMT
Angle	± 3'	PROJ.	Customer NO.		

WCON

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com