
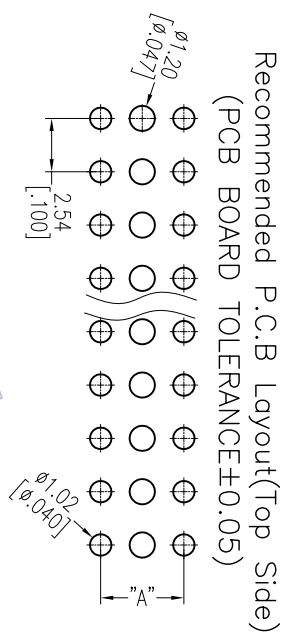


HSF

NOTES:

Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: LCP+30%G.F UL94V-0

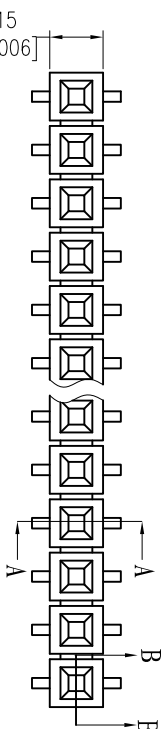



Ordering Information

2185E - 1 XX W XX D U N T X

No. of Pins per Row: 502-40Pin

Contact Plating:
 G0=Gold Flash
 G3=10μr Gold
 G4=15μr Gold
 G5=30μr Gold
 S0=Gold Flash/Trin
 S3=10μr Gold/Trin
 S4=15μr Gold/Trin
 S5=30μr Gold/Trin
 SN=Tin
 SW=Wave Tin

Packing:
 T=Tube
 Series No.:

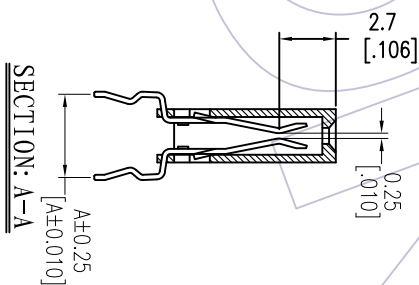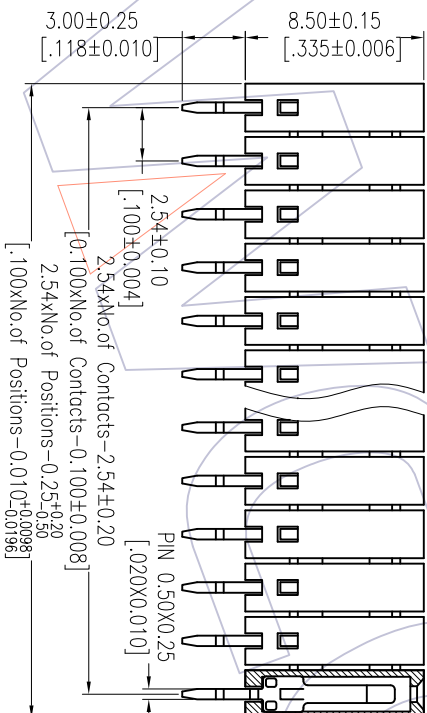

SECTION: B-B

TITLE(DIM:A)	PART NO.
1=3.96	2185E-1XXWXXDUNX1
2=3.17	2185E-1XXWXXDUNX2
3=5.08	2185E-1XXWXXDUNX3

Item	Pitch	Mating
Standard	2.54	1115/1120/1125
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A1	2013/01/02	Modify Drawing	-----	XX	Wang	2013/01/02	mm	A4	SEE TABLE
A0	2012/08/16	NEW	-----	XX	CHECK	DATE	mm	A4	TITLE: FH2.54 SINGLE ROW H=8.5 Provision Broken
			-----	Angle	APPROVE	DATE	mm	1/1	Customer NO.
			-----	± 3'					
			-----	DIM					
			-----	TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com

WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com