

HSF

NOTES:
 Rated Current:3.0AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40℃ to +105℃

Contact Material:Phosphor Bronze or Brass \triangle
 Contact Plating:Au Or Sn Over Ni
 Insulator Material:PA9T+30%G.F UL94V-0(Std)
 Or PBT+30%G.F UL94V-0

Ordering Information

2185DN X - 1 XX S XX X YN XX

Add number
0-4pcs


No. of Pins per
ROW:02-40PIN

Contact Plating:
 G0=Gold Flash
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin

Insulator:
 A=PBT
 C=PA9T



Packing:
 A=Tray
 T=Tube

Item	Pitch	Mating
Standard	2.54	1125
Alternate		

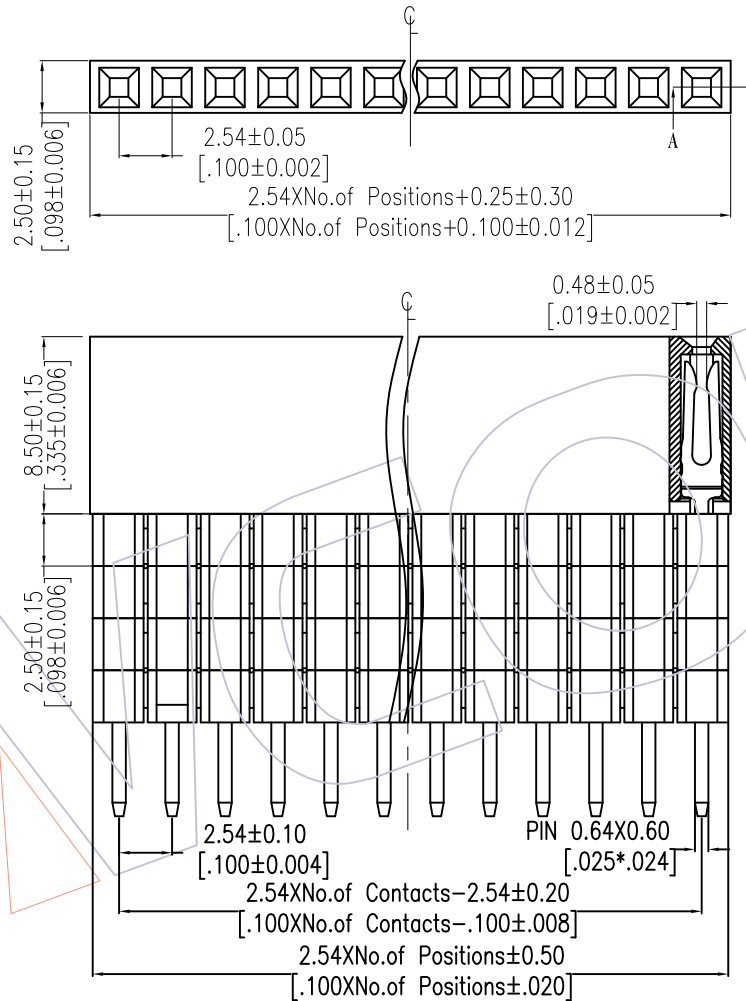

SECTION A-A

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

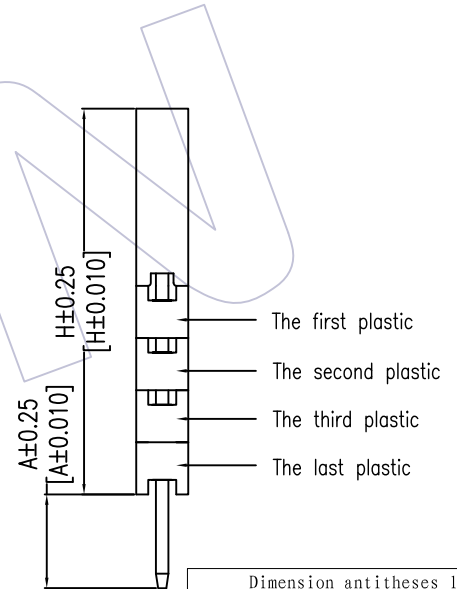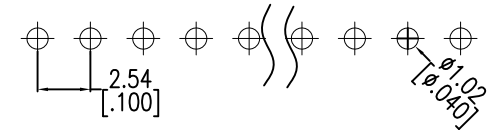

Dimension antitheses list			
PART NO.	Add Number	Dim H	Dim A
2185DN0-1XXSXXYNXX	0	8.50	4.85
			9.95
2185DN1-1XXSXXYNXX	1	11.05	7.35
			12.2
2185DN2-1XXSXXYNXX	2	13.59	4.85
			9.65
2185DN3-1XXSXXYNXX	3	16.13	2.30
			7.10
2185DN4-1XXSXXYNXX	4	18.67	4.60

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				X.X ±0.40	Wang	2014/10/08	UNIT	mm	SEE TABLE
A1	2014/10/08	Modify drawing	-----	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: FH2.54 SINGLE 180° ADD HOUSING H=8.5+HOUSING
AO	2012/08/24	NEW	-----	X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3'			PROJ.		
				DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--