

HSF

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:


- Current Rating: 3.0AMP
- Contact Resistance:30mΩ max
- Withstand Voltage:1000V AC/DC
- Insulation Resistance:1000MΩ
- Operation Temperature:-55℃~+105℃

- Contact Material: Phosphor Bronze
- Contact Plating: Au and Sn over Ni
- Fixing Material: Phosphor Bronze
- Fixing Plating: Sn over Ni
- Housing Material: PBT+30% G.F(UL94V-0)
- Cover Material: PBT+30% G.F(UL94V-0)

Ordering Information

3410-3 XX X FS SX X A X

- No.of Pins Per Row: 10pin, 16pin, 32pin
- Rows with Contacts: A=a+b+c, B=a+b, C=a+c, D=a
- Contact Plating: S0=Gold Flash/Tin, S1=3u"Gold/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin
- Packing: A=Tray
- DIP Length: 1: L=2.50, 2: L=3.00, 3: L=4.00, 4: L=4.57
- W=With Lock, N=Without Lock

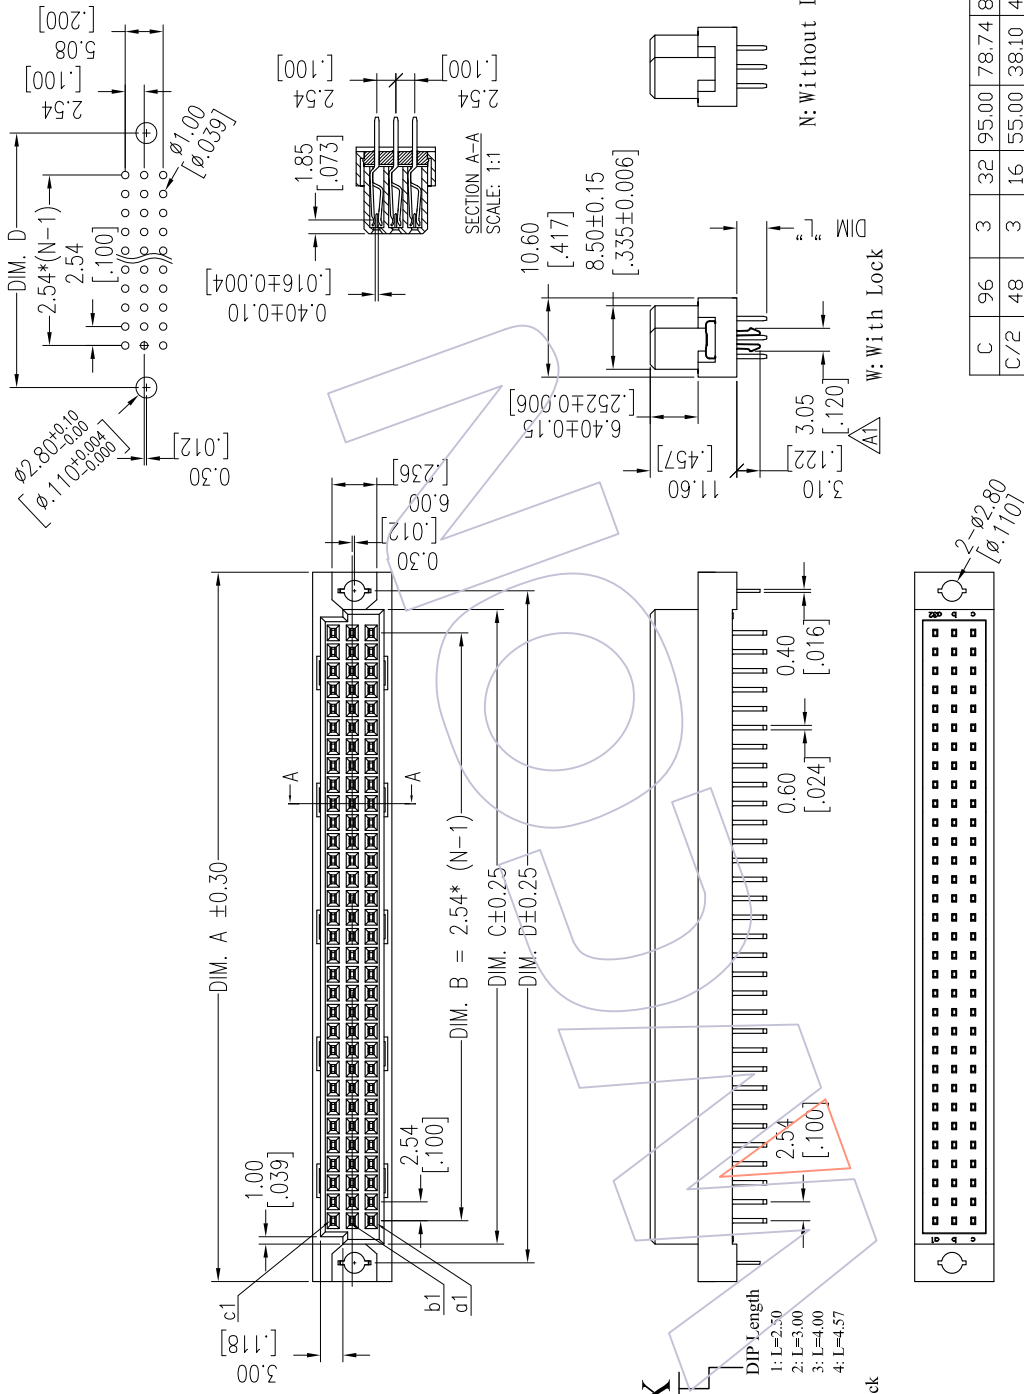

C	96	3	32	95.00	78.74	85.00	90.00
C/2	48	3	16	55.00	38.10	44.40	50.00
C/3	30	3	10	39.76	22.86	29.10	34.76
TYPE	POS.	ROWS	N	DIM.A	DIM.B	DIM.C	DIM.D

WCON
 Http: www.wcon.com
 WCON-Dongguan WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: sales@wcon.com

PART NO.	3410-3XXXXSSXX
TITLE:	2.54PITCH DIN 41612 C, C/2, C/3 TYPE FEMALE
Customer NO.	

OPERATION	DATE	SCALE	FIT
X.X ±0.40	2014/08/12	UNIT	mm
X.XX ±0.25	DATE	SIZE	A4
X.XXX ±0.15	DATE	SHEET	1/1
Angle ± 3'	DATE	PROJ.	
DIM TOL			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2014/08/12	Modify the dim	
A0	2014/05/29	NEW	