
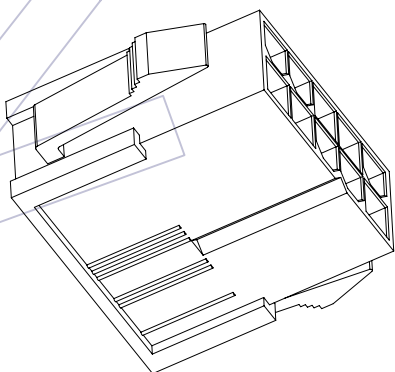
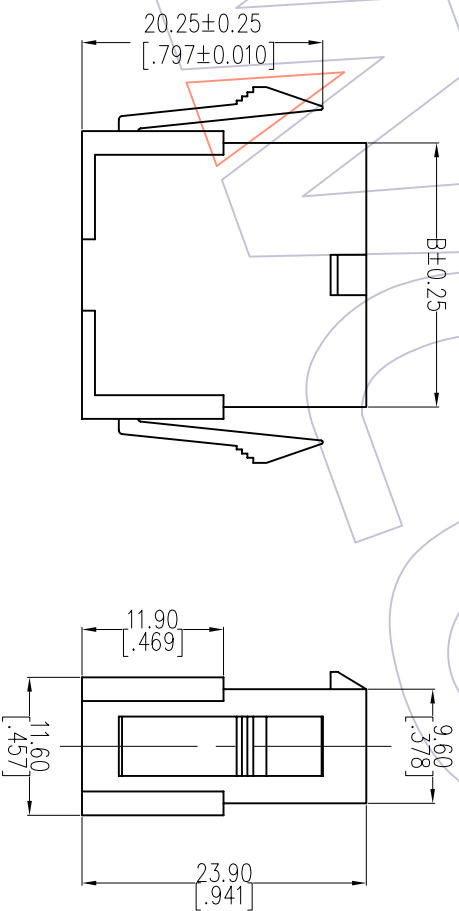


HSF

NOTES:
 Rated Current: 9.0A
 Contact Resistance: 20mΩ max
 Withstand Voltage: 1500V AC/Minute
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -25°C to +85°C
 Insulator Material: PA66
 Used with: WF4202-MT(Male Terminal)

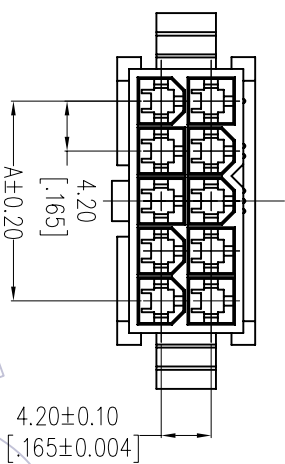

Ordering Information

WF4202-2 H K XX W 0 1

No. of Row
Dual Row

No. of pins
01P~12P

Color
W=White 0=PE Bag
B=Black

Packing
0=PE Bag

Dimensional & Ordering Information

Circuit	Part No.	Dimension	
		A	B
2x01	WF4202-2HK01W01	---	5.40
2x02	WF4202-2HK02W01	4.20	9.60
2x03	WF4202-2HK03W01	8.40	13.80
2x04	WF4202-2HK04W01	12.60	18.00
2x05	WF4202-2HK05W01	16.80	22.20
2x06	WF4202-2HK06W01	21.00	26.40
2x07	WF4202-2HK07W01	25.20	30.60
2x08	WF4202-2HK08W01	29.40	34.80
2x09	WF4202-2HK09W01	33.60	39.00
2x10	WF4202-2HK10W01	37.80	43.20
2x11	WF4202-2HK11W01	42.00	47.40
2x12	WF4202-2HK12W01	46.20	51.60

OPERATION	DATE	SCALE	FIT	PART NO.
X.X	2012/09/17	UNIT	mm	SEE TAB
±0.40		SIZE	A4	TITLE:
CHECK	DATE	SHEET	1/1	4.20 HOUSING DUAL ROW
X.XX		PROJ.		弹片式卡钩
±0.25				Customer NO.
X.XXX				
±0.15				
Angle				
± 3°				
DIM				
TOL				

OPERATION

DATE

SCALE

FIT

PART NO.

SEE TAB

TITLE:

4.20 HOUSING DUAL ROW

弹片式卡钩

Customer NO.

Customer NO.

WCON

Http: www.wcon.com

WCON-Dongguan

WCON-Kunshan

Tel: +86 769 85358920

Fax: +86 769 85358915

E-mail: sales@wcon.com

E-mail: sales@wcon.com

E-mail: sales@wcon.com

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

OPERATION

DATE

SCALE

FIT

PART NO.

SEE TAB

TITLE:

4.20 HOUSING DUAL ROW

弹片式卡钩

Customer NO.

Customer NO.

Customer NO.

Customer NO.