



HSF

NOTES:

Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze Δ
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

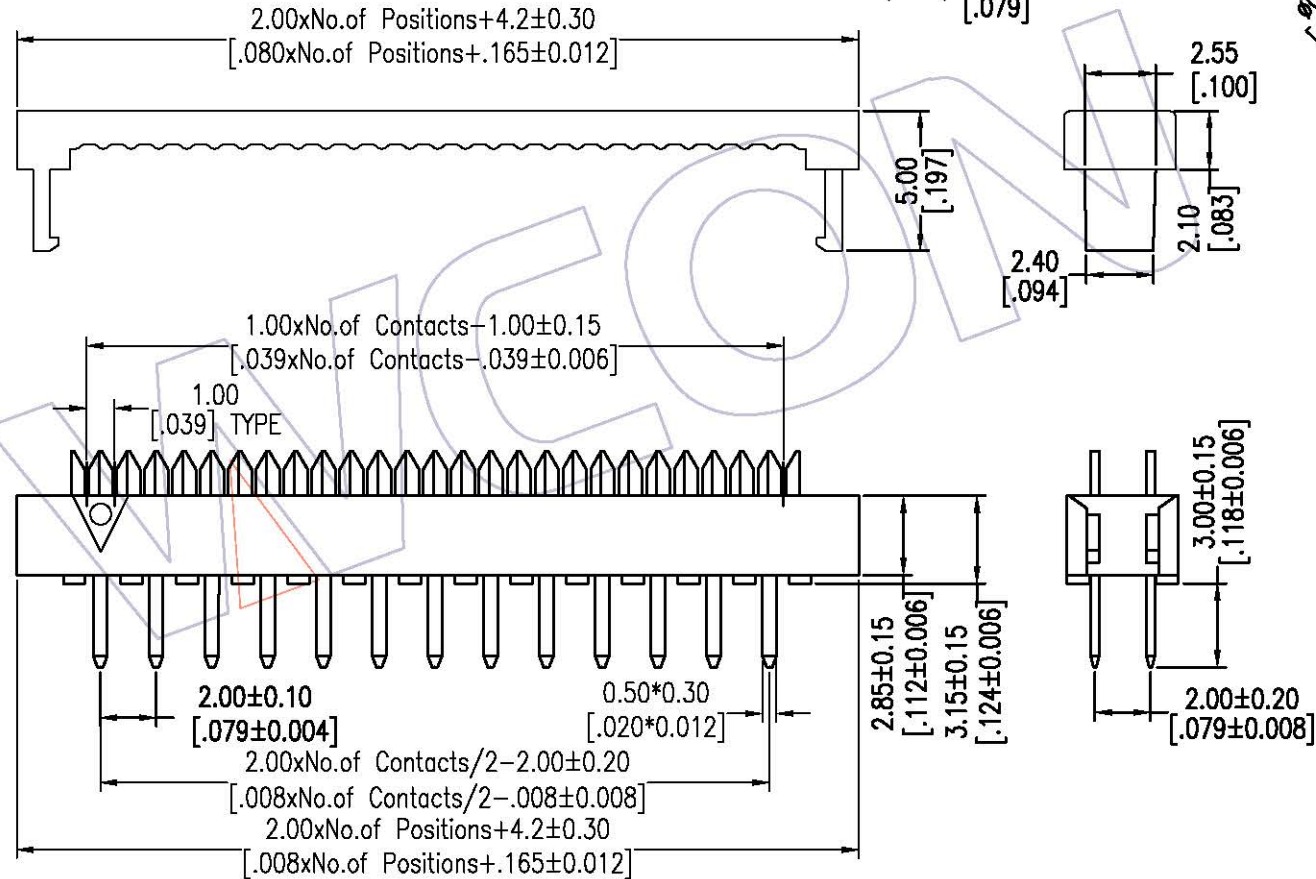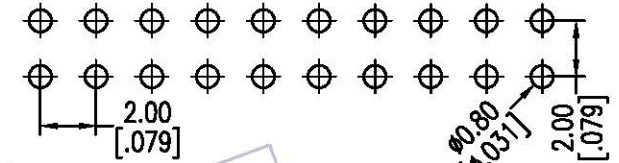

Ordering Information

5320- XX P XX B 01

No. of Pins	Contact Plating	Color Insulator
10 30	S0=Gold Flash/Ni	B=Black
14 34	S3=10r*Gold/Ni	G=Grey(427C)
16 40	S4=15r*Gold/Ni	B=Grey(413C)
18 44	S5=30r*Gold/Ni	
20 50	SN=Tin	
24 60	SM=Matte Tin	
26 64		

				OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				X.X ±0.40	JYHuang	2013/07/03	UNIT	mm	5320-XXPXXB01 Δ
A1	2013/07/03	Modify The Contact Material, Modify Part No.	-----	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: 2.00 DIP PLUG CONNECTOR
A0	2012/10/09	NEW	-----	X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ± 3'	DIM	TOL	PROJ.		

WCON

Http: www.wcon.com

WCON-Dongguan	WCON-Kunshan
Tel: +86 769 85358920	Tel: +86 512 57468408
Fax: +86 769 85358915	Fax: +86 512 57468468
E-mail: sales@wcon.com	E-mail: salesks@wcon.com