

HSE


NOTES:

Rated Current: 1.75AMP
 Contact Resistance: 20mΩ max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 5000MΩ min
 Operation Temperature: -55°C to +125°C
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: CP+30%G.F UL94V-0

Ordering Information

3231-XX M XX B S T 1

- No. of Pins: 06, 26, 08, 30, 10, 34, 14, 40, 16, 44, 20, 50
- Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold
- Insulator Color: B=Black
- Packing: T=Tube, P=Tube+CAP, R=Tube&Reel+CAP
- S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin

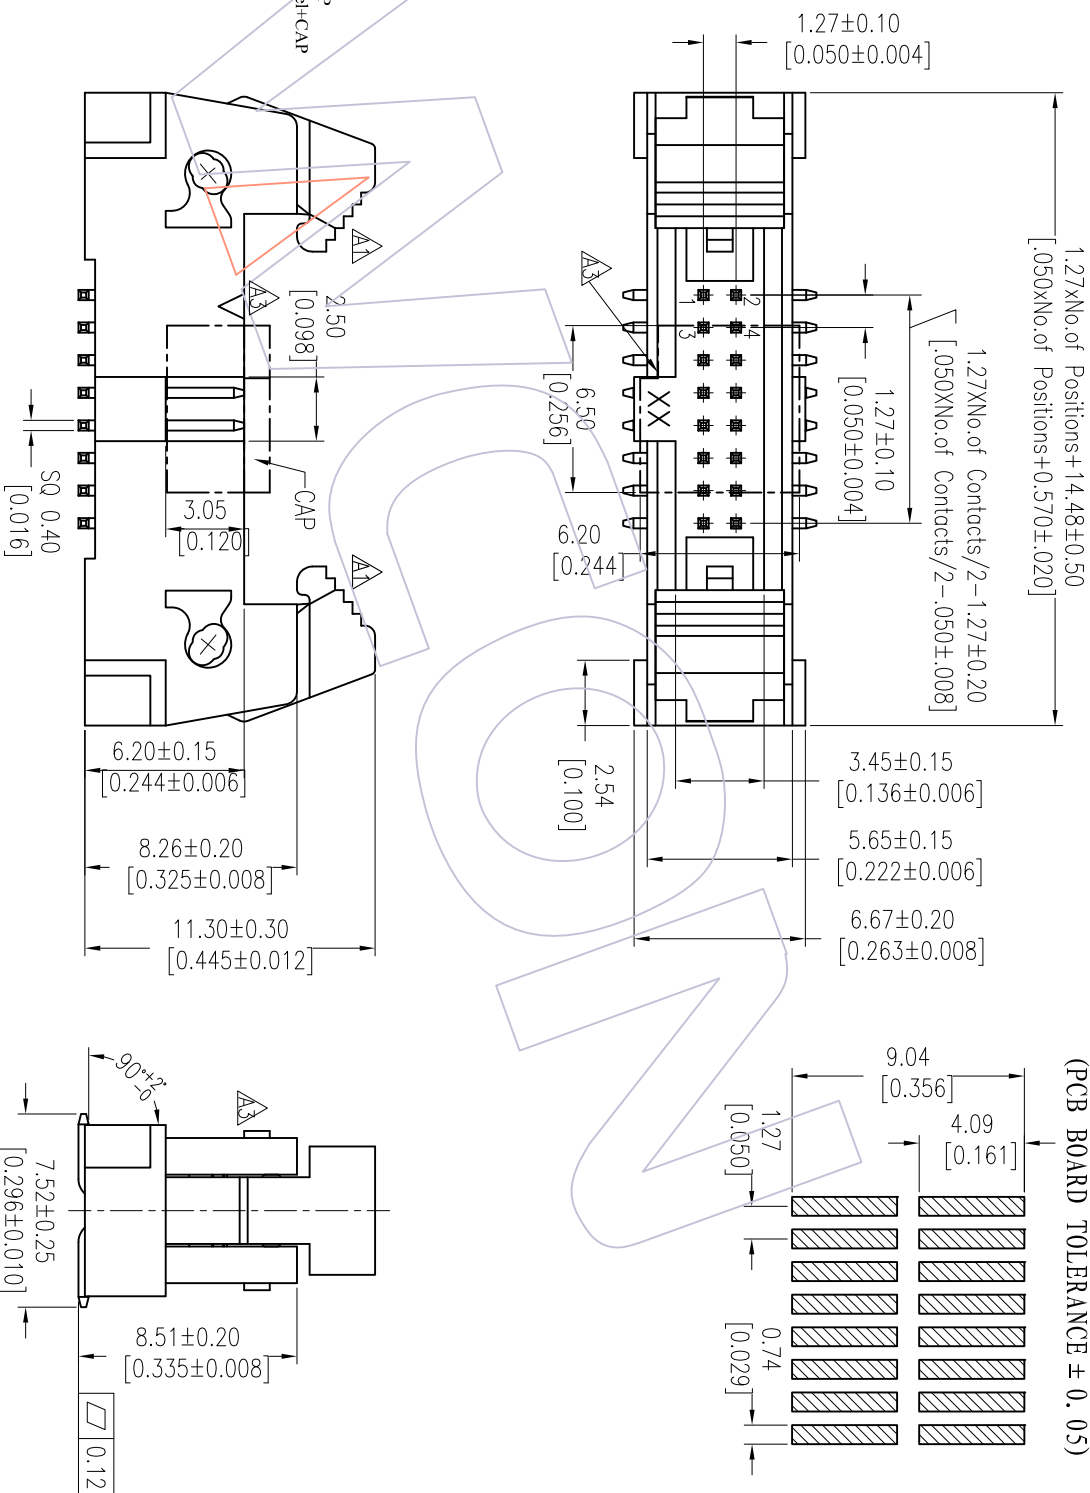

Recommended P. C. B Layout (Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE: 1.27 Ejector Header "S" Type SMT W/O fork Customer NO.	WCON-Dongguan Http: www.wcon.com WCON-Kunshun Tel: +86 769 85358920 Tel: +86 512 57468408 Fax: +86 769 85358915 Fax: +86 512 57468468 E-mail: sales@wcon.com E-mail: sales@wcon.com
A3	2012/08/31	Modify CAP		XX	TsingSn	2012/08/31	mm		3231-XXMXXBST1		
A2	2010/08/09	Modify drawing		XXX	CHECK	DATE	inch				
A1	2010/06/24	Modify drawing		XXXX		DATE	A4				
A0	2009/11/21	NEW		Angle	APPROVE	DATE	SHEET	1/1			
				± 3'			PROJ				

WCON