

# HSF

NOTES:  
 Current Rating: 2.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
 Contact plating: Au Or Sn over Ni  
 Insulator Material: PA9T+30%GF UL94V-0

## Ordering Information

2243-2 XX W XX CUN X X




No. of Pins per Row: 02-40Pin

Contact Plating:  
 G0=Gold Flash  
 G3=10μ"Gold  
 G4=15μ"Gold  
 G5=30μ"Gold  
 S0=Gold Flash/Tin  
 S3=10μ"Gold/Tin  
 S4=15μ"Gold/Tin  
 S5=30μ"Gold/Tin  
 SN=Tin  
 SM=Matte Tin

Packing:  
 T=Tube  
 A=Tray

Series No.:  
 1=TYPE 1  
 2=TYPE 2

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ±0.05)

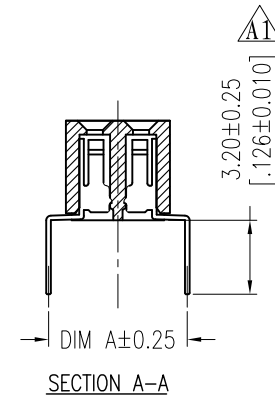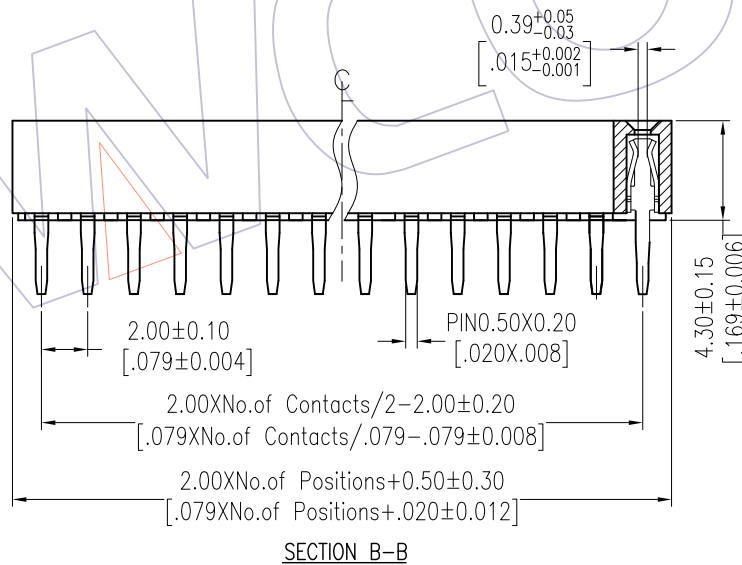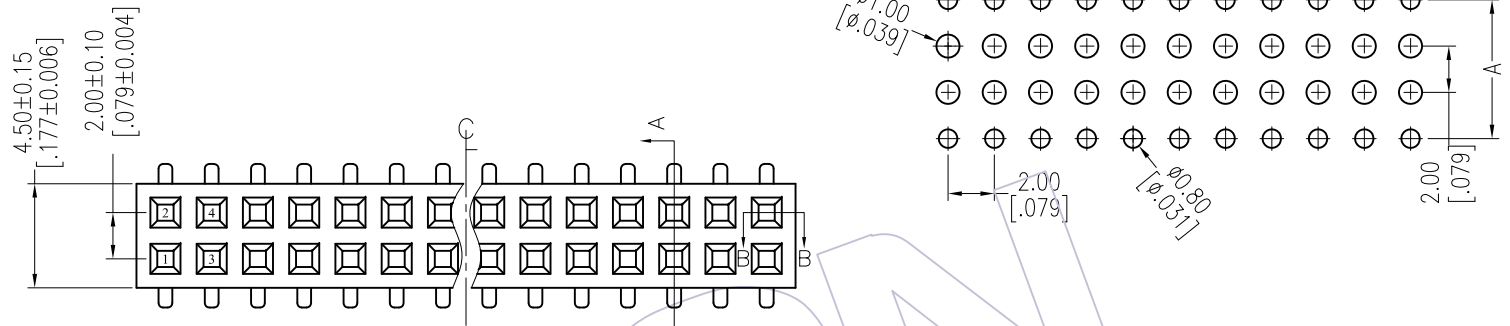

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

TITLE	DIM A	PART NO.
TYPE 1	6.00	2243-2XXWXXCUNX1
TYPE 2	5.00	2243-2XXWXXCUNX2

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A1	2015/09/14	Modify 3.00 to 3.20	A1	x.x ±0.40	Allen	2015/09/14	UNIT	mm	2243-2XXWXXCUNXX
AO	2012/07/14	NEW	-----	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE: FH2.00mm DUAL ROW H=4.30 180°DIP
				x.xxx ±0.15			SHEET	1/1	Customer NO.
				Angle ± 3'	APPROVE	DATE	PROJ.		
				DIM TOL					

**WCON**  
 Http: www.wcon.com

WCON-Dongguan  
 Tel: +86 769 85358920  
 Fax: +86 769 85358915  
 E-mail: sales@wcon.com

WCON-Kunshan  
 Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: salesks@wcon.com