HSF

NOTES:
Current Rating: 3.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40℃ to +105℃

Contact Material: Brass
Contact plating: Au over Ni
Insulator Material: PBT+30%G.F UL94V-0
10~16Pin Without "A"

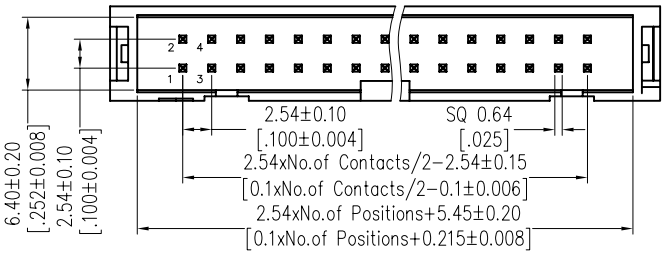

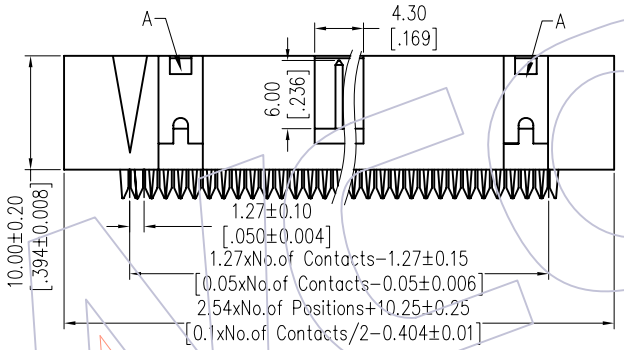



Ordering Information

3810- XX XX N G N 0 X

No.of Pins	Contact Plating	Insulator Colour	Logo		
10 30	S0=Gold Flash/Ni	G=Gray(427C)	N=Without Logo		1:Two Part
14 34	S3=10u"Gold/Ni	E=Gray(413C)	W=With Logo		2:Three Part
16 40	S4=15u"Gold/Ni	B=Black			
20 50	S5=30u"Gold/Ni				
24 60	A1				
26 64					

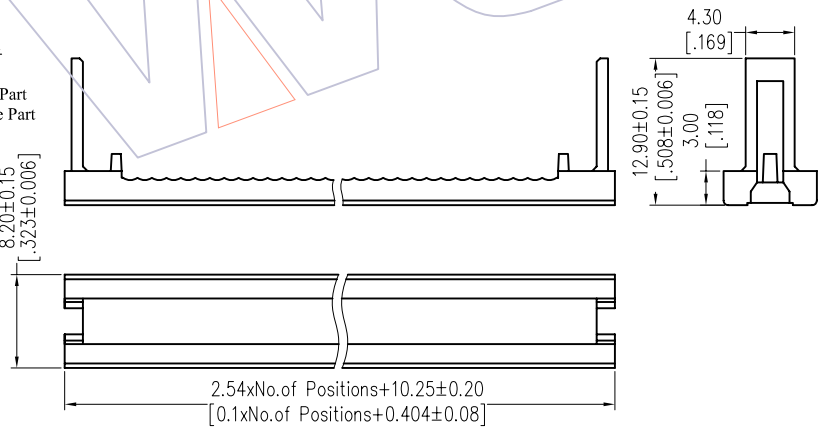

COVER

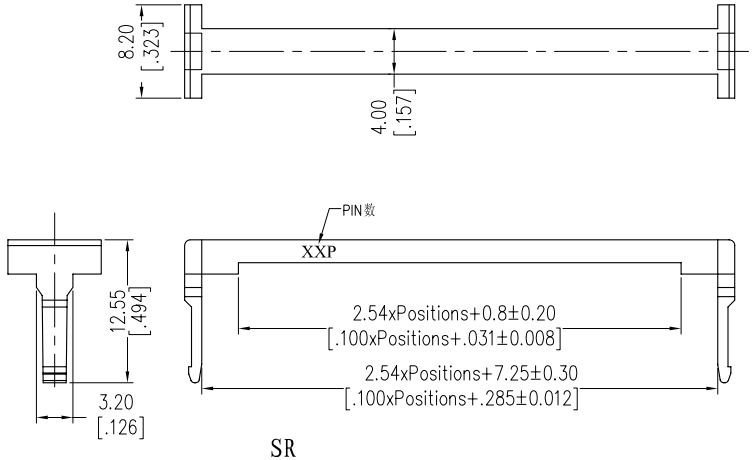

SR

Item	Pitch	Mating
Standard	2.54	5212/5211
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2012/11/22	Modify The Contact Plating	------
A0	2012/09/25	NEW	------

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	JYHuang	DATE	2012/09/25
CHECK		DATE	
APPROVE		DATE	

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. 3810-XXXXNGN0X

TITLE: 2.54mm BOX HEADER IDC TYPE

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com