

HSF

NOTES:


- Current Rating: 0.5AMP
- Contact Resistance: 60mΩ Max
- Withstand Voltage: 500V AC/DC
- Insulation Resistance: 100MΩ Min
- Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au over Ni
 Insulator Material: PA9T+30%G.F. UL94V-0

Ordering Information

3621-S XXX - XXX XX X 01

- No. of Pins
- Housing High Socket=H2
- Contact Plating C0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold
- T=Tube P=Tube+CAP R=Tube&Rel

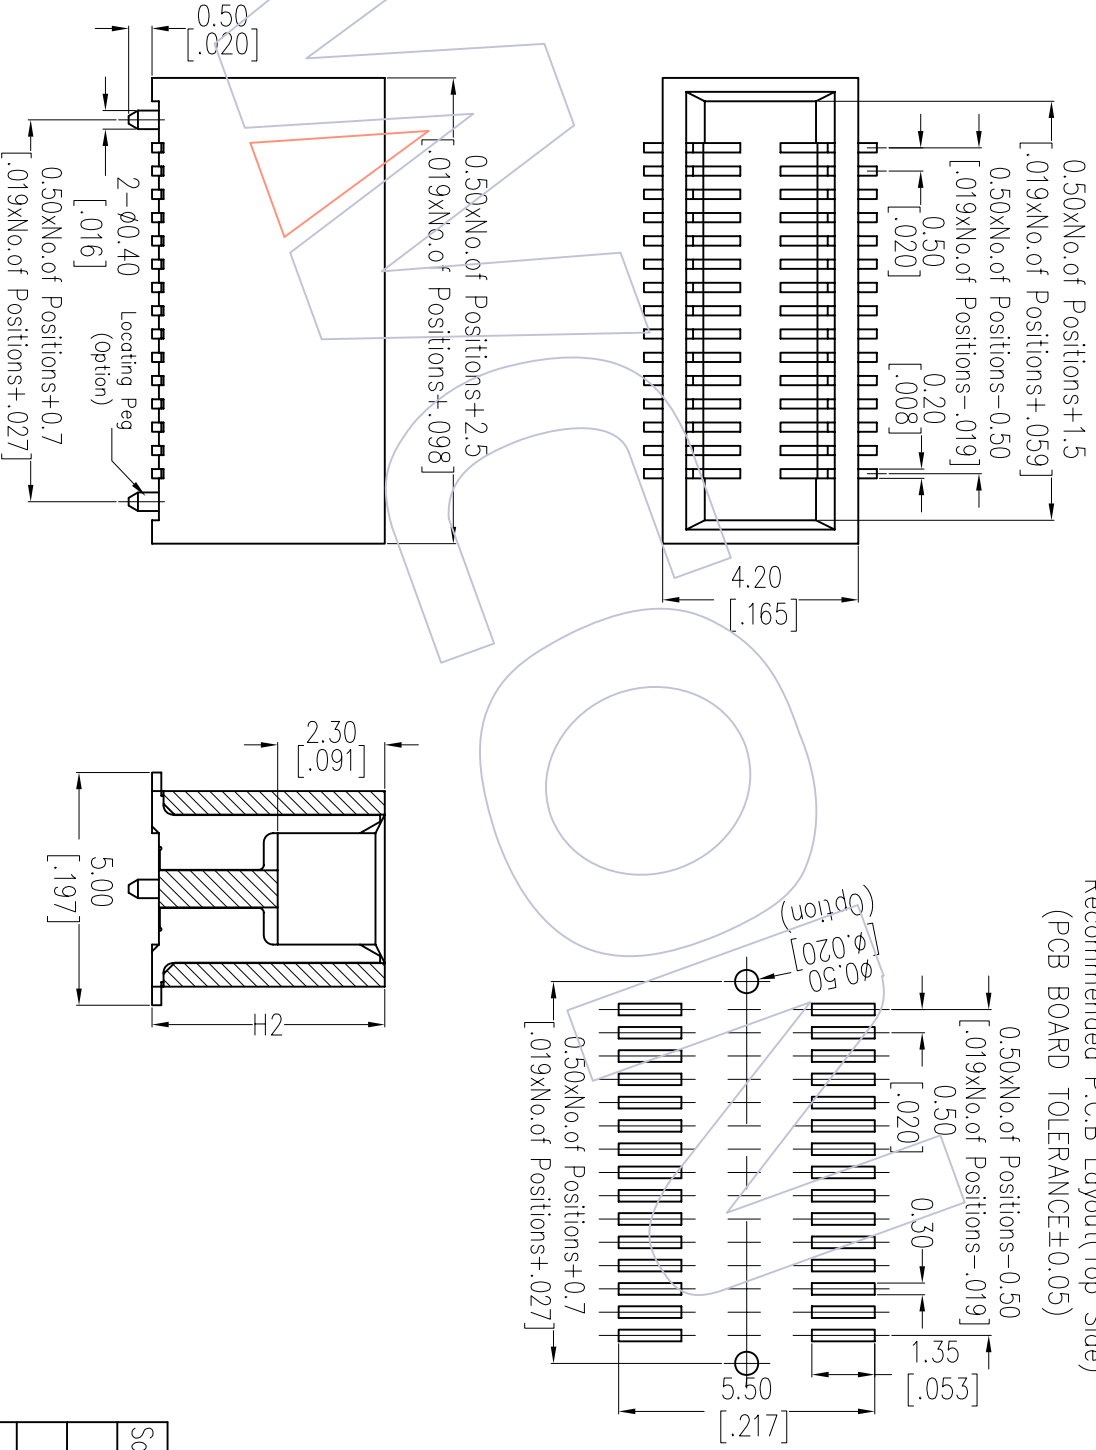

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Socket(H2)	3.00
	3.50
	5.95

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	WCON Http: www.wcon.com WCON-Dongguan WCON-Kunshan
XX	JYHuang	2012/11/22	UNIT	mm	3621-SXXX-XXXXXX01	
XX	CHECK	DATE	SIZE	A4	TITLE:	0.50mm B0 T0 B0 SOCKET CONN BOX DUAL SLOTS Customer NO.
XXXX	±0.15	DATE	SHEET	1/1	Customer NO.	
ANGLE	± 3°	DATE	PROJ.			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE			
A0	2012/11/22	NEW				

WCON

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com