

# HSF


NOTES:

- Current Rating: 1AMP
- Contact Resistance: 30mΩ max
- Withstand Voltage: 500V AC/DC
- Insulation Resistance: 1000MΩ min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact plating: Au Over Ni
- Insulator Material: PA9T+30%GF(UL94V-0)

## Ordering Information

3150A-XX M XX B K00 X X

- No. of Pins: 2-100P
- Contact Plating: G0=Gold Flash, G1=3u"Gold, G2=5u"Gold, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold
- Color Insulator: B=Black
- Packing: T=Tube, P=Tube+Mylar, R=Rect+Mylar

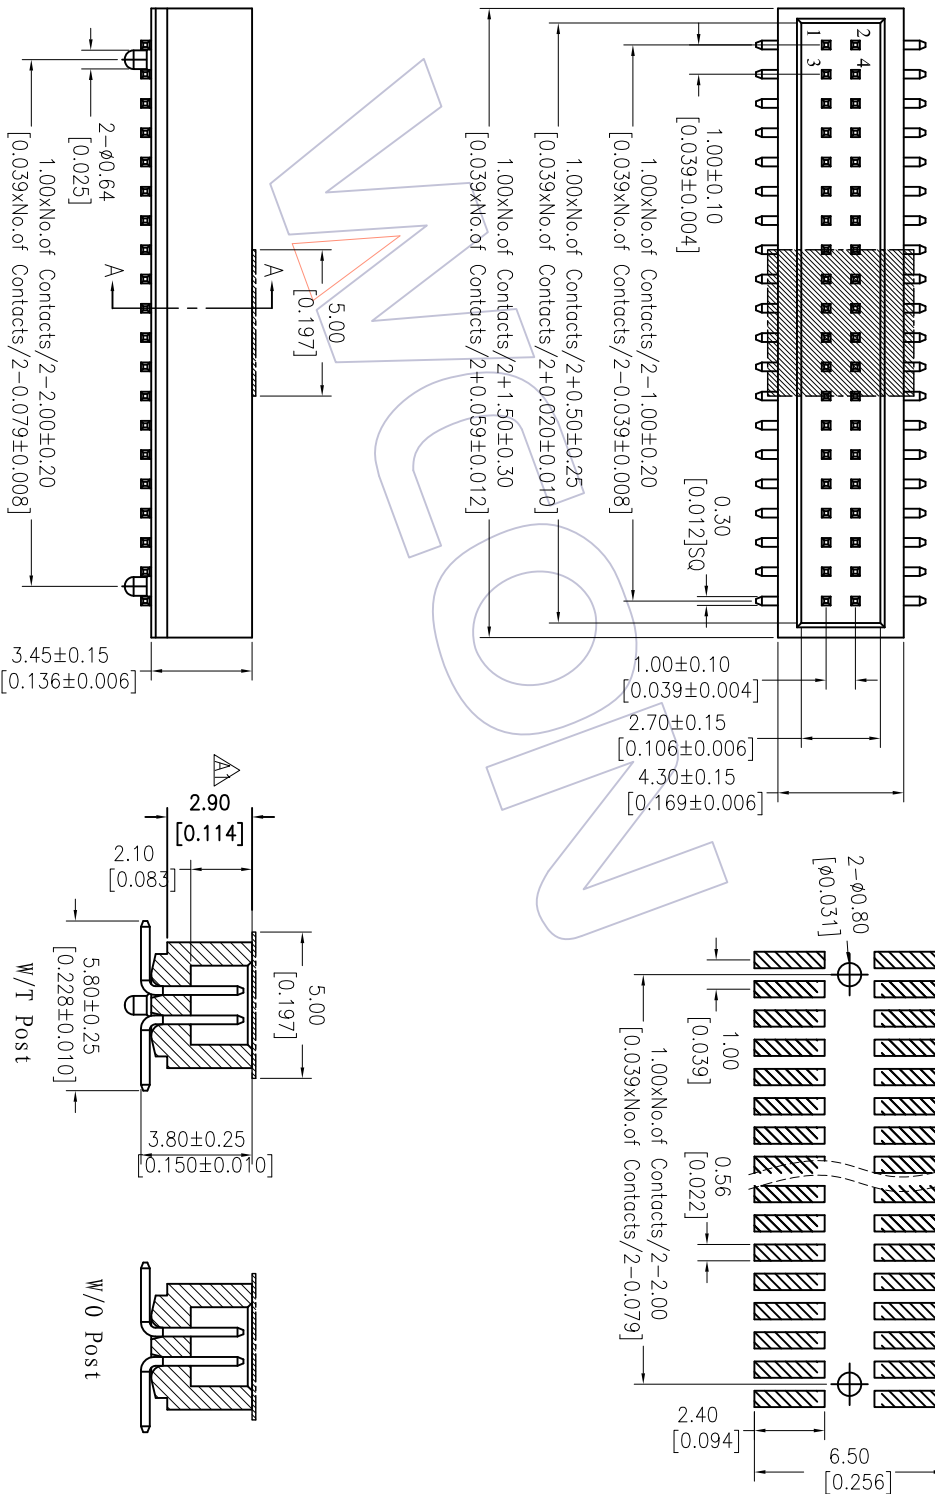

Recommended P.C.B. Layout(top Side)  
(PCB BOARD TOLERANCE±0.05)

REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
A1	2015/06/01		Modify	-----	X.XX	Allen	2015/03/31	mm	A4	3150A-XXMXXBK00XX	1.00 BOX HEADER SMT H=3.45	Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
A0	2015/03/31		NEW	-----	X.XXX	CHECK	DATE	SHEET	1/1				
REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	DIW	APPROVE	DATE	PROJ.					

# WCON

Http: www.wcon.com  
WCON-Dongguan  
Tel: +86 769 85358920  
Fax: +86 769 85358915  
E-mail: sales@wcon.com  
WCON-Kunshan  
Tel: +86 512 57468408  
Fax: +86 512 57468468  
E-mail: sales@wcon.com