

HSF

NOTES:

Rated Current:0.5AMP AC/DC
 Rated Voltage:30V AC/DC
 Contact Resistance:20mΩ max
 Withstand Voltage:200V AC/Minute
 Insulation Resistance:100MΩ min
 Operation Temperature:-25°C to +85°C



Contacts Material:Phosphor Bronze
 Contacts Plating:Tin-Plating
 Insulator Material:PA66 UL94V-0
 Insulator Color:White

Applicable Wire:AWG#32
 Insulator O.D.:0.38mm

Ordering Information

WF 0801 - HI XX W 01

No. of pins
 02pin-20pin
 Color
 W=White

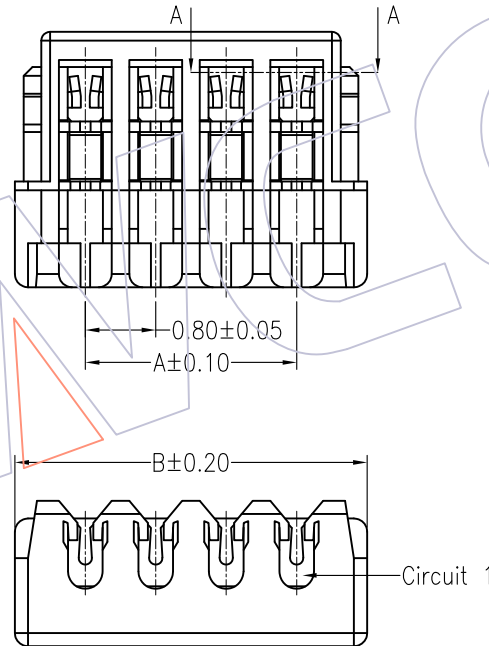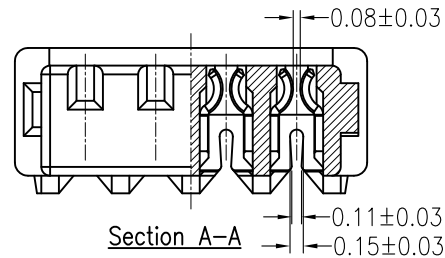

Specification & Ordering Information:

Circuit	Part No.	Dimension	
		A	B
02	WF0801-HI02W01	0.80	2.40
03	WF0801-HI03W01	1.60	3.20
04	WF0801-HI04W01	2.40	4.00
05	WF0801-HI05W01	3.20	4.80
06	WF0801-HI06W01	4.00	5.60
07	WF0801-HI07W01	4.80	6.40
08	WF0801-HI08W01	5.60	7.20
10	WF0801-HI10W01	7.20	8.80
12	WF0801-HI12W01	8.80	10.40
14	WF0801-HI14W01	10.40	12.00
15	WF0801-HI15W01	11.20	12.80
16	WF0801-HI16W01	12.00	13.60
17	WF0801-HI17W01	12.80	14.40
20	WF0801-HI20W01	15.20	16.80

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW Ding	DATE 2017/05/11	SCALE	FIT	PART NO. SEE TAB
				X.X	±0.40					
				X.XX	±0.25	CHECK	DATE	UNIT	mm inch	TITLE: 0.80mm HOUSING IDC TYPE
				X.XXX	±0.15	APPROVE	DATE	SIZE	A4	Customer NO.
AO	2017/05/11	NEW		Angle	± 3'					
				DIM	TOL			SHEET	1/1	
								PROJ.		

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com