



UL&CSA GRADE:
 UL Style.....2678
 Rate Temperature.....-20°C TO 105°C
 Rate Voltage.....Max 150V
 Flame Test.....VW-1

CSA Standard.....C22.2 NO.210.2
 Rate Temperature.....-20°C TO 105°C
 Rate Voltage.....Max 150V
 Flame Test.....FT1,FT2

Stranded Conductor:
 AWG Size.....30AWG


印字内容:

▲ FLAWMM 2678 30AWG 105° C 150V VW-1 E332441 YAQBO c FLAWMM I A 105° C 150V FT1

Ordering Information

F1U-A 30 G XX X 0 - XXXX-X

PITCH 0.635
 No.of Pins 8-80P
 Conductor Spec D=7/0.102 S=1/0.20
 Flat Cable Length

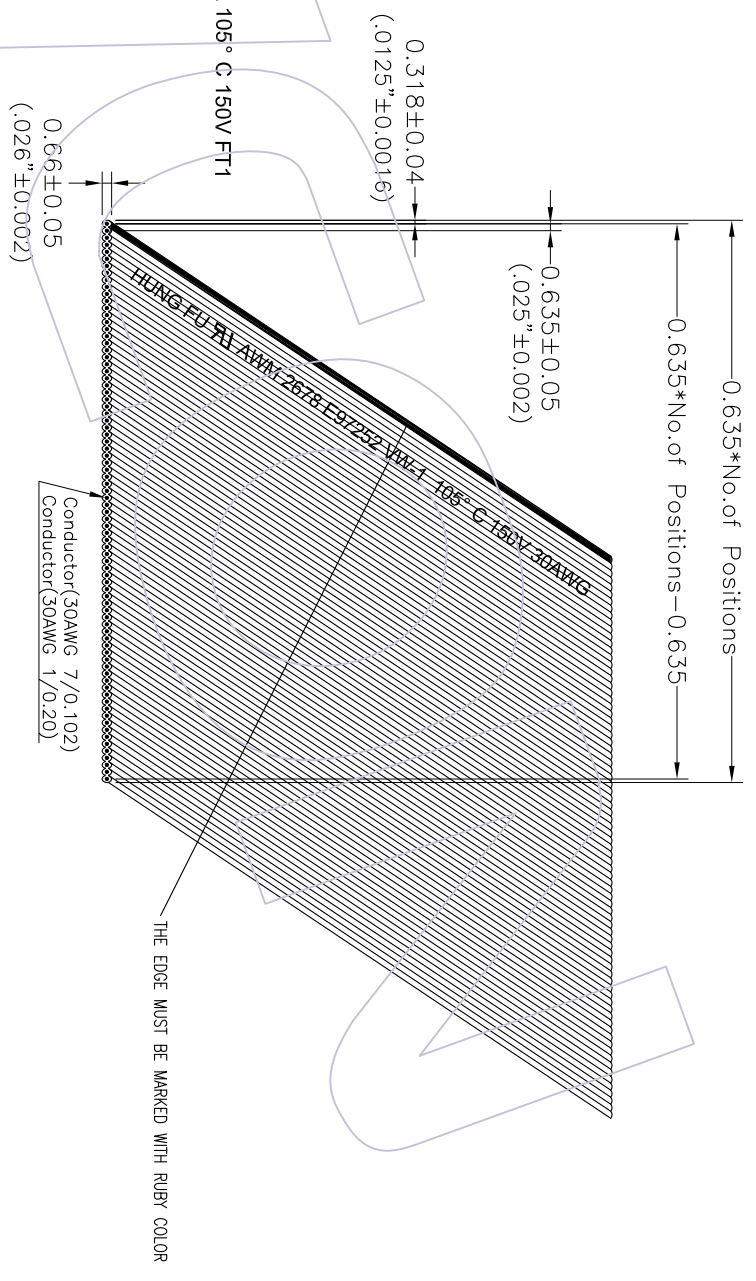

Conductor	Material of Insulation	Insulation of Thickness	Spark Test	Resistance (1 minute)	Conductor 20° C Resistance	Insulation Resistance	Impedance	Capacitance	Propagation Delay
7/0.102 Tin	PVC	Min 6mil	AC 1500V	AC 1500V	Max 376Ω/KM	Min 1KΩ-M	G-S-G 72Ω	G-S-G 98PF/M	5.2ns/M
1/0.20 Tin	PVC	Min 6mil	AC 1500V	AC 1500V	Max 361Ω/KM	Min 1GΩ-M	G-S 77Ω	G-S 92PF/M	5.0ns/M

A3	2014/11/05	更改印字内容及颜色	OPERATION	DRAW	DATE	SCALE	PART NO.	WCON Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
A2	2013/07/03	更改印字内容	XX	JYHuang	2014/11/05	mm	F1U-A30GXXXX-XXXX-X	
A1	10/09/04	增加排线UL号码	XXX	CHECK	DATE	A4	UL2678 0.635 30AWG 灰排线	
AD	09/08/24	NEW	Angle	APPROVE	DATE	SHEET 1/1	Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION	CHANG	DIM	TOL	PROJ.		