

HSF



NOTES:
 Rated Current:3.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK(std)
 or PBT+30%G.F UL94V-0 BK



Ordering Information

1125-22 XX XX R XXX X 0 XX $\triangle A1$

No. of Pins Per Row:02~40	Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	Pin Length(Short) L=A+B+D1+D2+5.3 Standard:	Insulator Material A=PBT C=PA9T	Packing 0=PE Bag T=Tube	Series No. 01~99
------------------------------	---	---	---------------------------------------	-------------------------------	---------------------

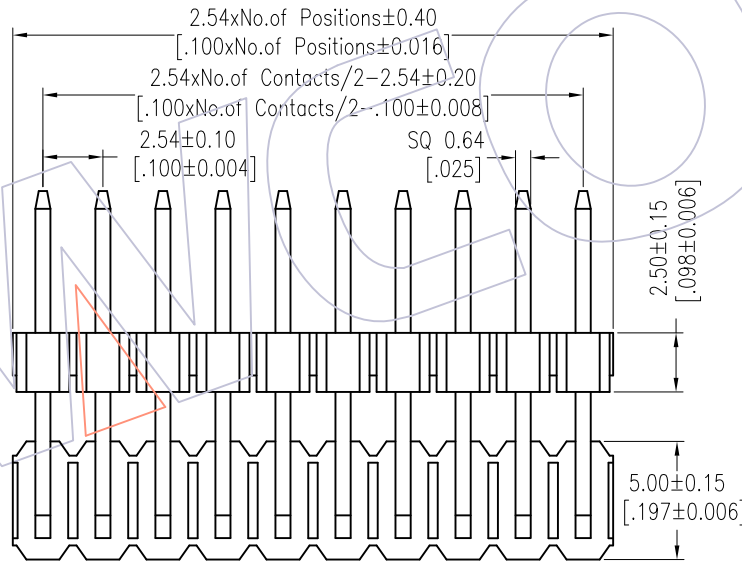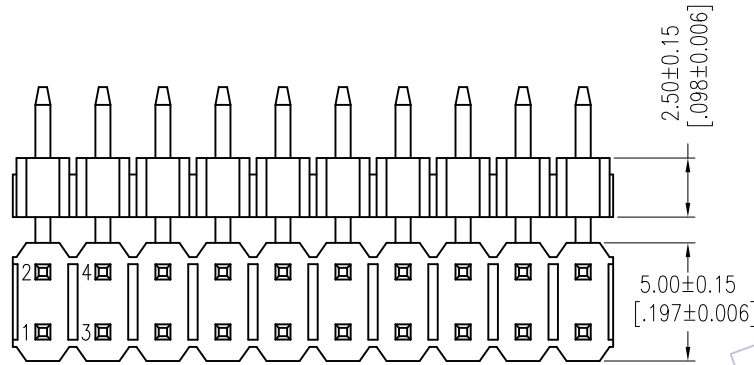

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

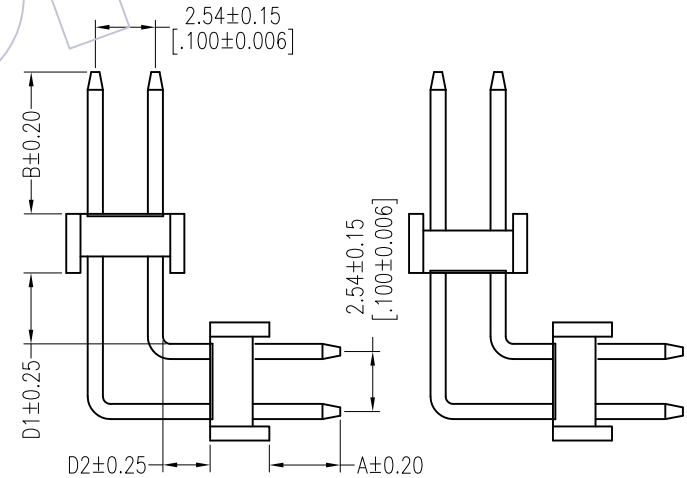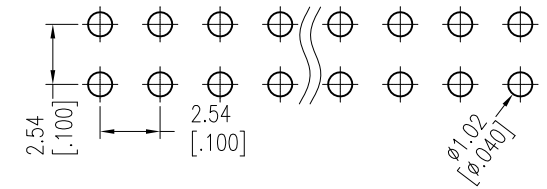

TYPE 1

TYPE 2

Item	Pin Length	A	D1	B	D2	Mating
Standard	----	3.00	----	6.00	----	2171 2185
Alternate						

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A1	2018/01/22	Modify P/N	$\triangle A1$	x.x ±0.40	Ruipeng	2018/01/22	UNIT	mm	1125-22XXXXRXXXXXX
A0	2012/05/28	NEW	-----	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE: PH2.54 DUAL ROW DOUBLE PLASTIC 90°MIDDLE BENDING H=2.5
				x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3'			PROJ.		
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
---	--