
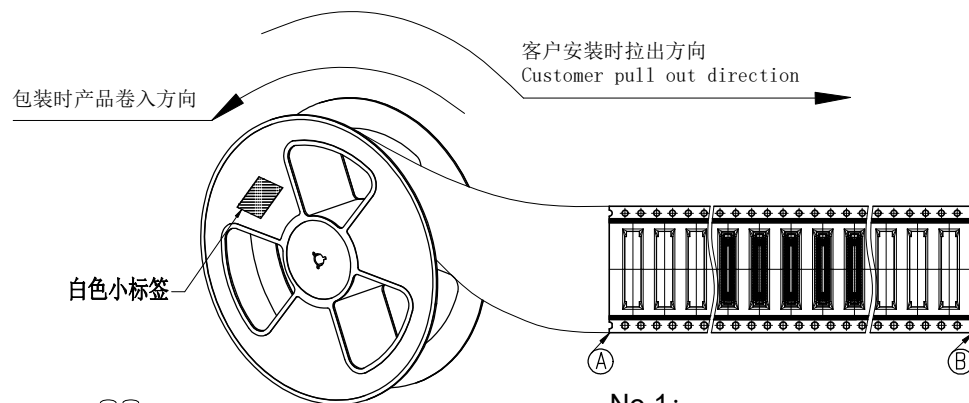



HSF

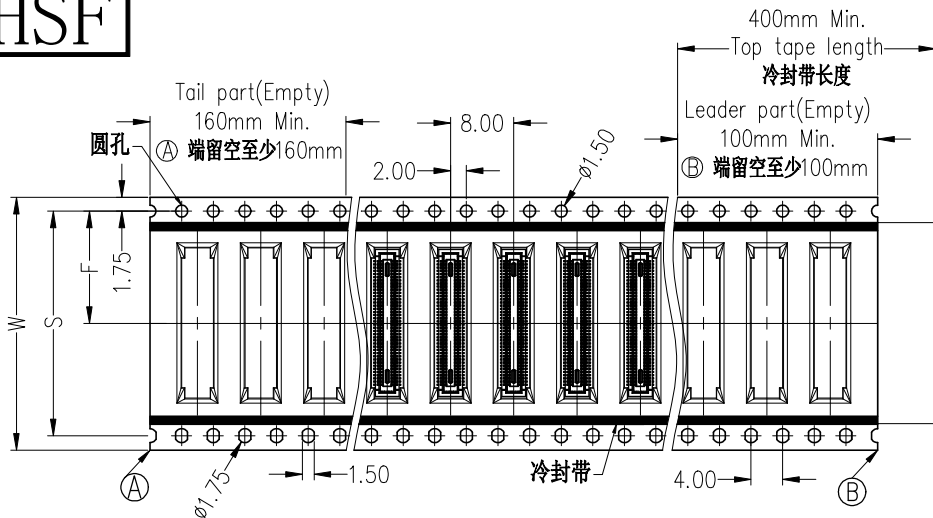

No.1:

产品包装前,注意载带要留空160mm以上
将产品放入载带凹槽后,用盖带封装,
注意:盖带与承载带的拉力30g-120g


环保大标签 黄色打包带




外箱: CTN-18K

No.4:

封箱, 打包, 贴标签。

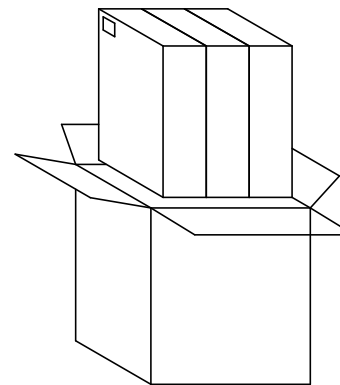

白色小标签



内箱: CTN-18E

No.3:

将内箱装入外箱(3内箱/外箱)
注意统一标签方向

No.2:

将卷盘套上PE-32防水袋,
放入1包干燥剂,
真空机封口后装入内箱,
用封箱胶封装好,并贴上标签。

PIN	载带料号	W	S	F	PCS/Reel	PCS/内箱	PCS/外箱
20	TR3630-FN020M03401	16.0±0.30	/	7.50±0.15	2000	8000	24000
30	TR3630-FN030M03401	24.0±0.30	/	11.50±0.15	2000	6000	18000
40	TR3630-FN040M03401	24.0±0.30	/	11.50±0.15	2000	6000	18000
50	TR3630-FN050M03401	24.0±0.30	/	11.50±0.15	2000	6000	18000
60	TR3630-FN060M03401	24.0±0.30	/	11.50±0.15	2000	6000	18000
80	TR3630-FN080M03401	32.0±0.30	28.40±0.15	14.20±0.15	2000	4000	12000

变更 记 事								工程图 ENGINEERING	绘图 DRAW	苏 珊	2021/05/29	SCALE	FIT	WCON WCON ELECTRONICS (GUANGDONG) CO., LTD	
								X.X	±0.30			UNIT	mm		
								X.XX	±0.20			SIZE	A4		
								X.XXX	±0.10			SHEET	1/1		
	A0	2021/05/29		NEW		-----	-----	Angle	± 2°			PROJ.	品名	TITLE:	0.4mm Board to Board, XXP, SMT, Female H=3.45 卷装规范
	版次 REV	日期 DATE		变 更 说 明 MODIFICATION DESCRIPTION		变 更 CHANGE	核 准 APPROVE								