

HSF

NOTES:

Rated Current: 7.0AMP.

Contact Resistance: 20mΩ Max.

Rated Voltage: 250V

Operation Temperature: -40℃ to +125℃

Body Material: PB1/PA9T,UL94V-0,BK

Cover Material: PA9T,UL94V-0,BK

Contact Material: Brass





Contact Plating:

15u" Gold on contact area




80u" Matte tin on solder area

30u" Nickel underplating overall

Ordering Information

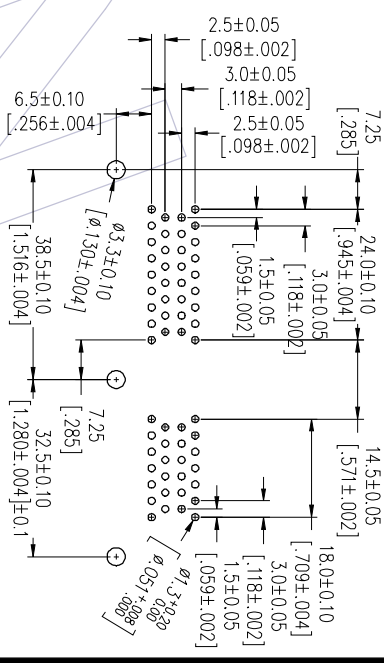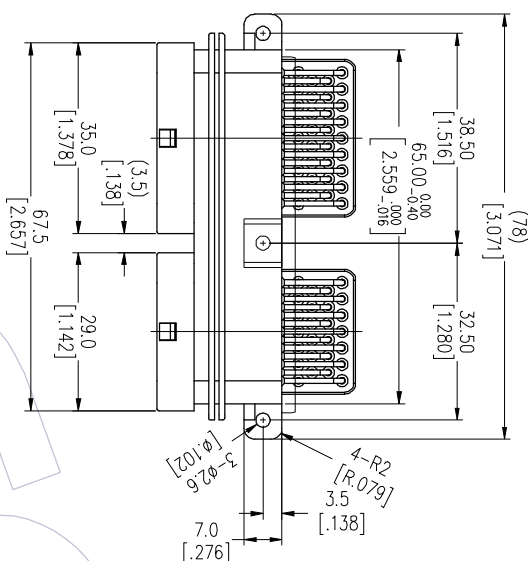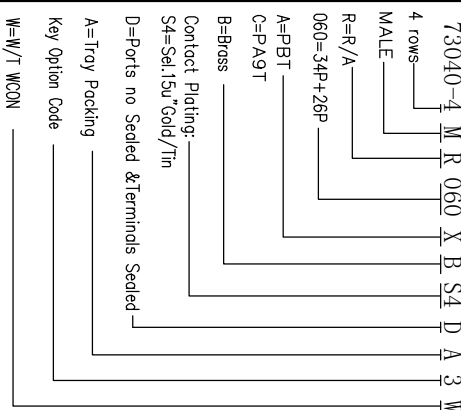

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

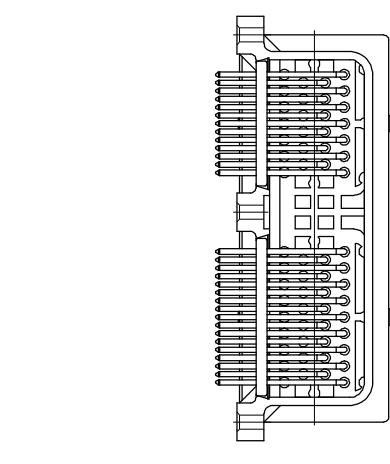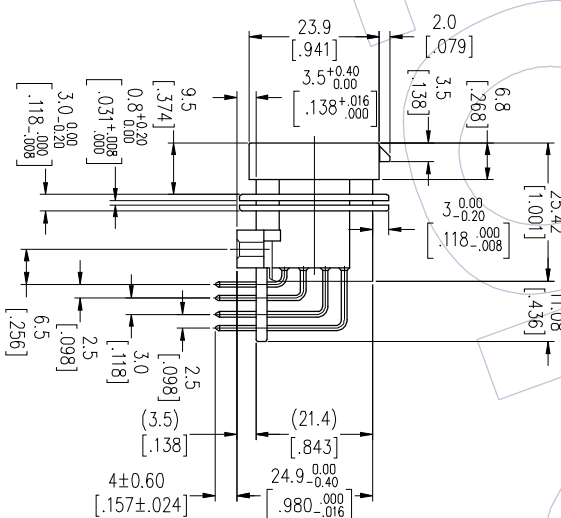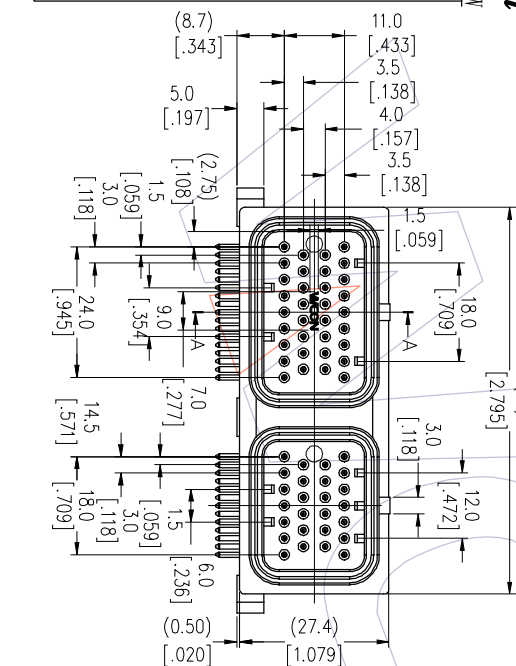

WCON

Http: www.wcon.com

WCON-Dongguan

Tel: +86 769 85358920

Fax: +86 769 85358915

E-mail: sales@wcon.com

WCON-Kunshan

Tel: +86 512 57468408

Fax: +86 512 57468468

E-mail: sales@wcon.com