
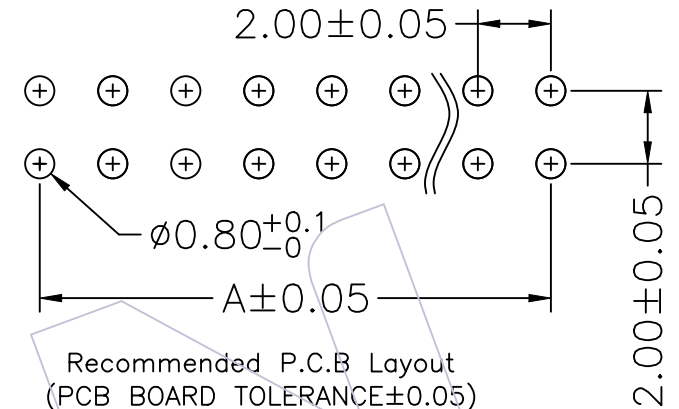


HSF

NOTES:
Rated Current:2A
Rated Voltage:250V AC/DC
Contact Resistance:20mΩ max
Withstand Voltage:800V AC/Minute
Insulation Resistance:1000MΩ min
Operation Temperature:-25℃ to+85℃
Material:PA66 UL94V-0

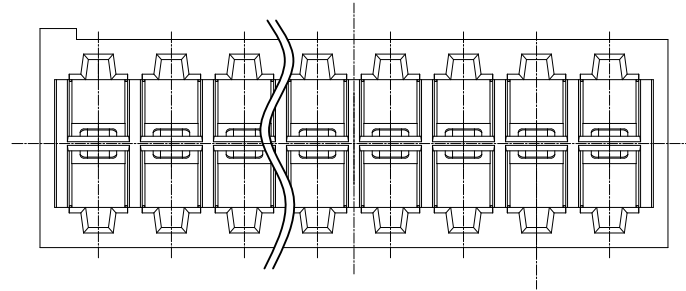

Recommended P.C.B Layout
(PCB BOARD TOLERANCE±0.05)


Dimensional & Ordering Information

Circuit	Part No.	Dimension	
		A	B
04	WF2004-2H02X01	2.00	5.2
06	WF2004-2H03X01	4.00	7.2
08	WF2004-2H04X01	6.00	9.2
10	WF2004-2H05X01	8.00	11.2
12	WF2004-2H06X01	10.00	13.2
14	WF2004-2H07X01	12.00	15.2
16	WF2004-2H08X01	14.00	17.2
18	WF2004-2H09X01	16.00	19.2
20	WF2004-2H10X01	18.00	21.2
22	WF2004-2H11X01	20.00	23.2
24	WF2004-2H12X01	22.00	25.2
26	WF2004-2H13X01	24.00	27.2
28	WF2004-2H14X01	26.00	29.2
30	WF2004-2H15X01	28.00	31.2

Ordering Information

WF2004 - 2H XX X 0 1

No. of pins
04P~30P
Color
E=Beige
W=White
B=Black
N=Brown
Packing
0=PE Bag

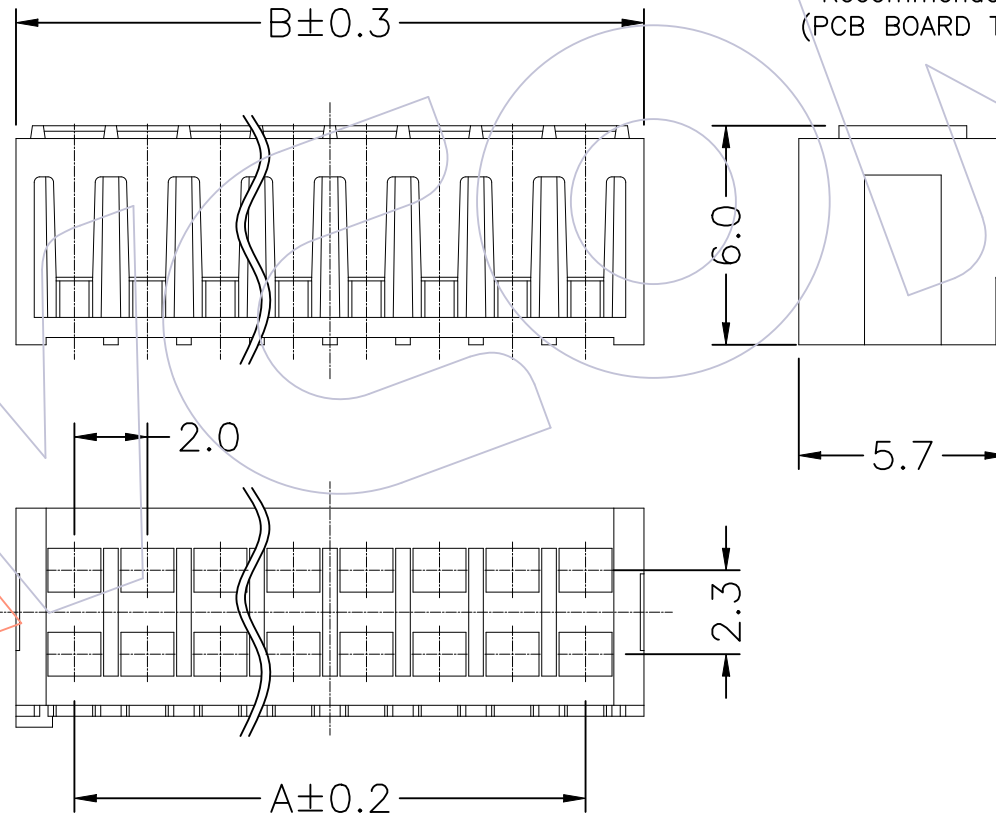

				OPERATION		DRAW Lytton	DATE 2023. 08. 23	SCALE	FIT	PART NO. SEE TAB	WCON Http: www.wcon.com WCON—Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON—Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
				X.X	±0.40		CHECK	DATE	UNIT		
				X.XX	±0.25	APPROVE	DATE	SIZE	A4		
X0	2023. 08. 23	NEW	——	X.XXX	±0.15			SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	± 3°			PROJ		Customer NO.	
				DIM	TOL						