

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----

Rated Current:2.0A
Rated Voltage:250V AC/DC
Contact Resistance:20mΩ max
Withstand Voltage:800V AC/Minute
Insulation Resistance:1000MΩ min
Operation Temperature:-25℃ to+85℃

Contact Material:Copper Alloy
Contact plating:100u"Tin over 30u"nickel


Ordering Information

WF2004-TB XX 02

Plating:
SN=Tin

Specification Information:

Wire Range	Insulation O.D
AWG#28~#24	ø0.90~1.30mm

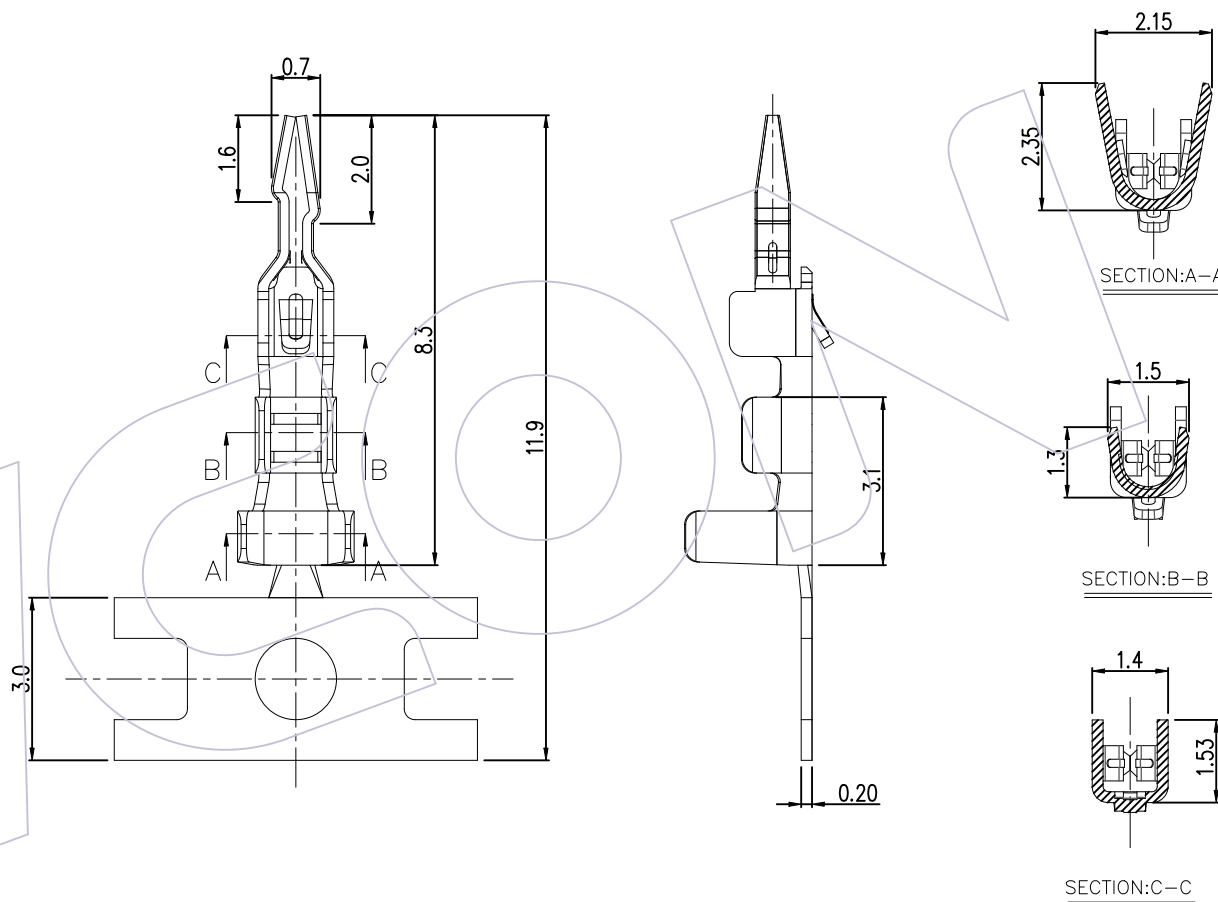

				OPERATION		DRAW LYTTON	DATE	SCALE	FIT	PART NO. WF2004-TBSN02	 Http: www.wcon.com	
				X.X	±0.40		2023. 08. 23	UNIT	mm			
				X.XX	±0.25	CHECK	DATE	SIZE	A4	TITLE: 2.0mm HOUSING Dual Row Terminal, Short Type Crimp Type	WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	
				X.XXX	±0.15							
X0	2023. 08. 23	NEW	—	Angle	± 3°	APPROVE	DATE	SHEET		Customer NO.	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			PROJ.				