
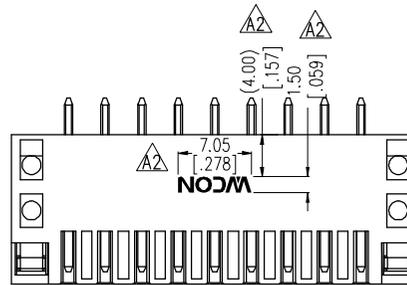


HSF

NOTES:


Rated Current: 9.5AMP
 Rated Voltage: 300V
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1600V AC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40℃ to +120℃

Contact Material: Copper Alloy
 Contact plating: 100u" Tin over 50u" nickel
 Insulator Material: PBT,UL94V-0,BK



W/T WCON $\Delta 2$


Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

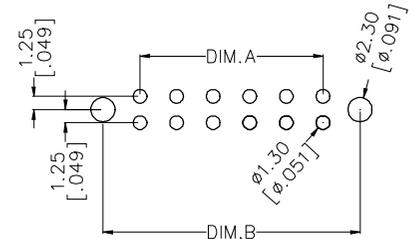


Ordering Information

PM350SW-2S XX X XX 2 N



No. of Pins Color Contact Plated Blank=W/T WCON
 B=BLACK SM=Matte Sn N=W/O WCON
 U=BLUE SN=Bright Sn
 G=GREEN
 R=RED

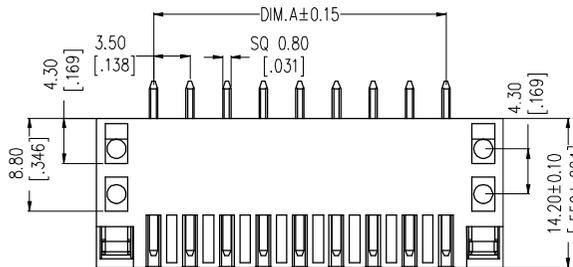

W/O WCON



SECTION B-B
 SCALE 1:1

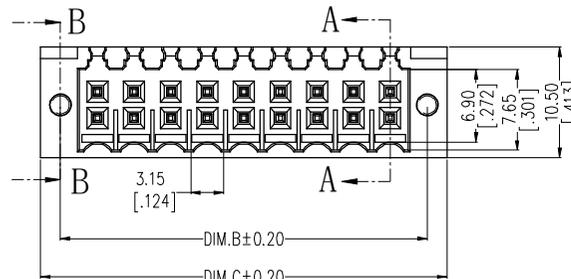

SECTION A-A
 SCALE 1:1

No. Of PIN	DIM.A	DIM.B	DIM.C
2X2	3.50	10.60	14.40
2X3	7.00	14.10	17.90
2X4	10.50	17.60	21.40
2X5	14.00	21.20	24.90
2X6	17.50	24.60	28.40
2X7	21.00	28.10	31.90
2X8	24.50	31.60	35.40
2X9	28.00	35.10	38.90
2X10	31.50	38.60	42.40
2X11	35.00	42.10	45.90
2X12	38.50	45.60	49.40
2X13	42.00	49.10	52.90
2X14	45.50	52.60	56.40
2X15	49.00	56.10	59.90
2X16	52.50	59.60	63.40
2X17	56.00	63.10	66.90
2X18	59.50	66.60	70.40
2X19	63.00	70.10	73.90
2X20	66.50	73.60	77.40
2X21	70.00	77.10	80.90
2X22	73.50	80.60	84.40
2X23	77.00	84.10	87.90

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A2	2022/04/27	Add W/T WCON SPEC. & P/N	XSR	x.x ±0.40	XSR	2022/04/27	UNIT	mm	PM350SW-2SXXXXX2(N) $\Delta 2$
A1	2021/12/22	Adjust the size	GH	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE: 3.50*2.50mm Pluggable Terminal Block Dual Row, Male, 180°DIP, W/T Nut Low Temperature Plastic
AO	2019/01/07	NEW	-----	x.xxx ±0.15	APPROVE	DATE	SHEET	1/2	Customer NO.
				Angle ± 3°			PROJ.		
				DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--