


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLFRANCE+0.05)

Current Rating: 3.0AMP
Contact Resistance: 30mΩ max
Withstand Voltage: 1500V AC
Insulation Resistance: 1000MΩ
Operation Temperature: -55℃~+105℃

Contact Material:	Phosphor Bronze
Contact Plating:	Au and Sn over Ni
Fixing Material:	Phosphor Bronze
Fixing Plating:	Sn over Ni
Housing Material:	PBT+30% G.F(UL94V-0)
Cover Material:	PBT+30% G.F(UL94V-0)

3410-3 XX A FR SX N A X

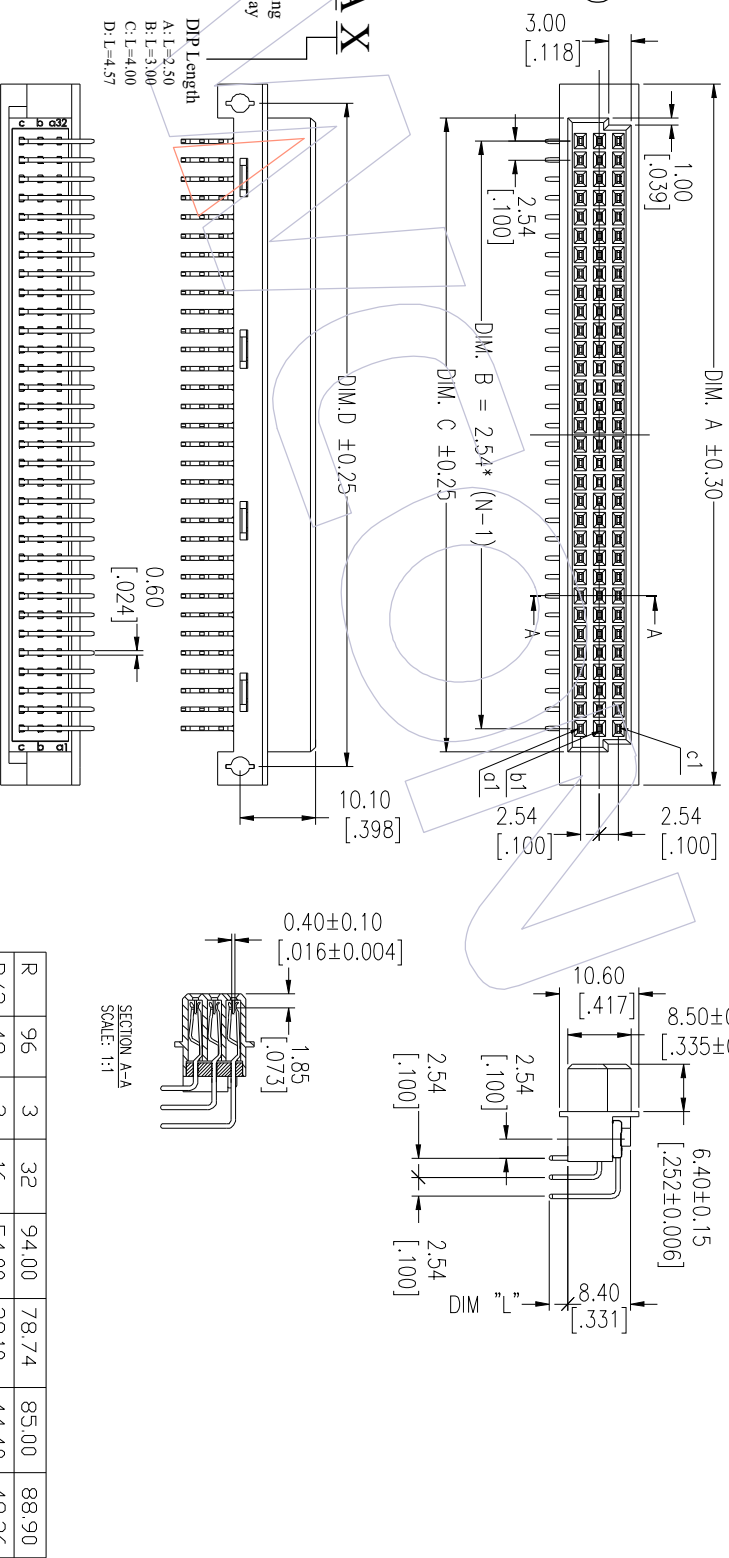

TYPE	POS.	ROWS	N	D1MA	D1MB	D1MC	D1MD
R	96	3	32	94.00	78.74	85.00	88.90
R/2	48	3	16	54.00	38.10	44.40	48.26
R/3	30	3	10	38.10	22.86	29.10	33.02

									
Http: www.wcon.com									
WCON - Dongguan					WCON - Kunshan				
Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com					Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com				
PART NO. 3410-3XXAFRSXNAX									
SCALE		FIT		TITLE: 2.54PITCH DIN 41612 TYPE FEMALE					
UNIT		mm inch							
SIZE		A4							
SHEET		1/1		Customer NO.					
PROJ.									
DATE		DATE		DRAW		DATE			
CHECK		CHECK		GH		2022/12/15			
X.XX		±0.25		X.X		±0.40			
X.XXX		±0.15		X.XX		±0.40			
Angle		± 3°		APPROVE		DATE			
DIM		TOL		CHANGE		DESCRIPTION			
REV		DATE		MODIFICATION		NEW			
A0		2022/12/15							