



HSF

NOTES:

Rated Current:5.0AMP.
Contact Resistance:20mΩ Max.
Withstand Voltage:1500V AC/DC
Insulation Resistance:1000MΩ Min.
Operation Temperature:-40℃ to +105℃

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:PA46+30%G.F UL94V-0 BK

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

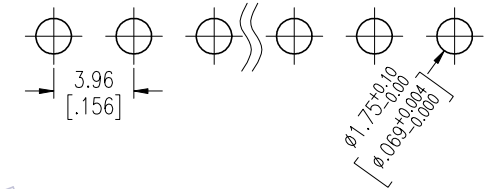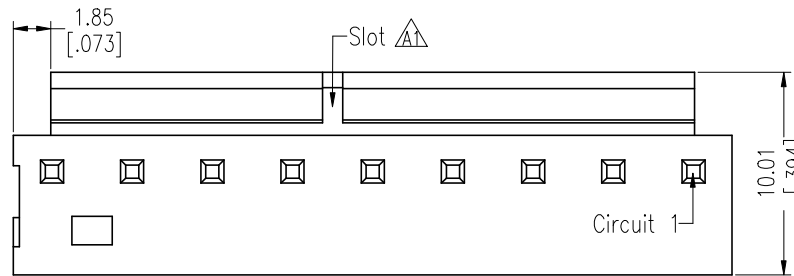

Ordering Information

WF3965 -WS XX X 0 1



No. of pins
02~18P

Contact Plating
S0=Gold Flash/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
Blank=Tin

Color
B=Black
E=Beige
T=Natural
W=White

Packing
0=PE Bag

H=PA46
Blank=PA66

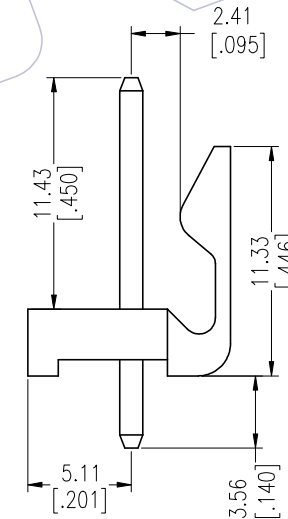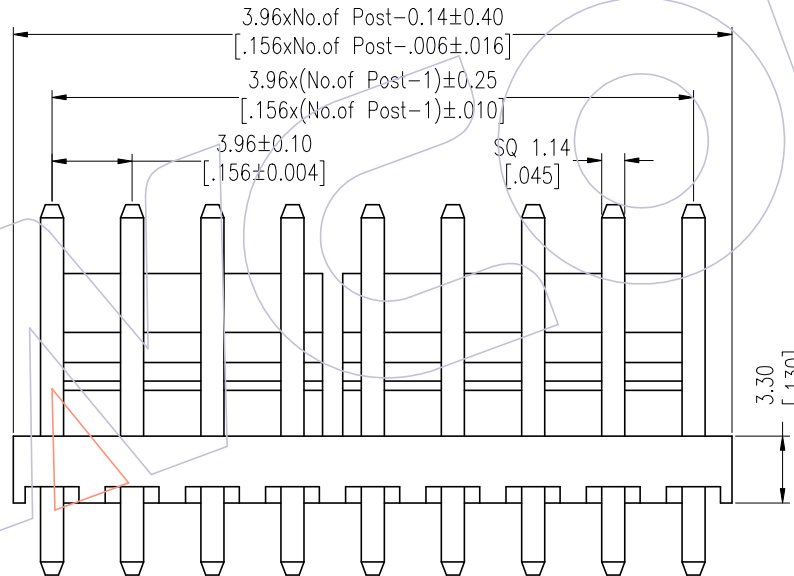

Circuit	Slot
2P	None
3P	None
4P	None
5P	None
6P	Between Circuit3&4P
7P	Between Circuit4&5P
8P	Between Circuit4&5P
9P	Between Circuit5&6P
10P	Between Circuit5&6P
11P	Between Circuit6&7P
12P	Between Circuit4&5P, 8&9P
13P	Between Circuit4&5P, 9&10P
14P	Between Circuit5&6P, 9&10P
15P	Between Circuit5&6P, 10&11P
16P	Between Circuit5&6P, 11&12P
17P	Between Circuit6&7P, 11&12P
18P	Between Circuit6&7P, 12&13P

			OPERATION		DRAW <i>William Chen</i>	DATE 2013.01.15	SCALE	Fit mm [inch]	PART NO. WF3965-WSXXX01
			X.X	±0.40					
A1	2013/01/15	Modify Drawing	X.XX	±0.25	CHECK	DATE			TITLE: 3.96mm WAFER 180° DIP
A0	2012/09/17	NEW	X.XXX	±0.15	APPROVE	DATE			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL				Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com