

# HSF



NOTES:  
 Rated Current: 7.0AMP.  
 Contact Resistance: 20mΩ Max.  
 Rated Voltage: 250V  
 Operation Temperature: -40℃ to +125℃

Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Body Material: PA9T UL94V-0 BK  
 Cover Material: PA9T UL94V-0 BK  
 Waterproof grade: IP67(After installation)







## Ordering Information

73040-4 M R 034 C B S4 D A X W

- 4 rows
- MALE
- R=R/A
- 034=34P
- C=PA9T
- B=Brass
- Contact Plating:
- S4=Sel.15U<sup>TM</sup>Au/Matte Sn
- D=Ports no Sealed & Terminals Sealed
- A=Tray Packing
- Key Option Code
- W=W/T WCON



Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ±0.05)

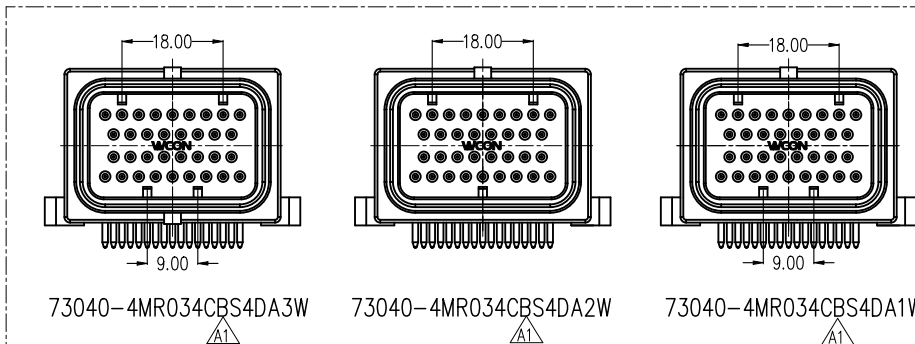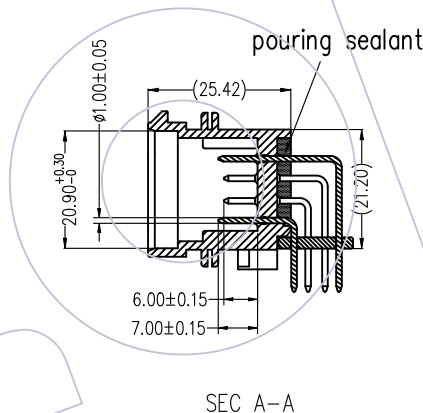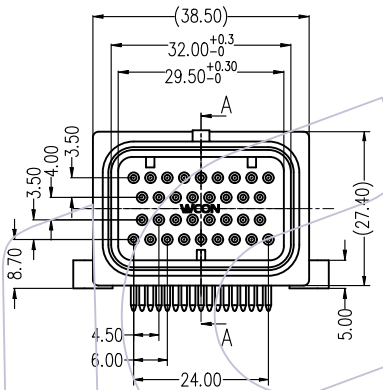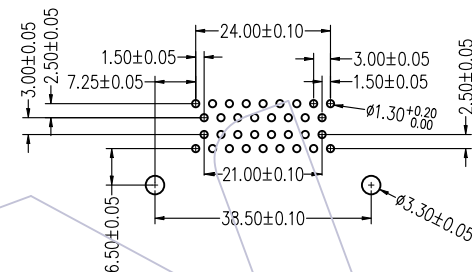

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE	Fit	PART NO.
				X	±0.60					
A1	2023/07/04	Correct P/N	XSR	X.X	±0.40	CHECK	2023/07/04	UNIT	mm	73040-4MR034CBS4DAXW
A0	2022/09/23	NEW	-----	X.XX	±0.25	APPROVE	DATE	SIZE	A4	TITLE: 3.0*4.0mm, SUPER SEAL CONN. 4 Rows, R/A Male 34P
				Angle	± 3°		DATE	SHEET	1/1	Customer NO.
				DIM	TOL			PROJ.		

# WCON

Http: [www.wcon.com](http://www.wcon.com)

WCON-Dongguan      WCON-Kunshan  
 Tel: +86 769 85358920      Tel: +86 512 57468408  
 Fax: +86 769 85358915      Fax: +86 512 57468468  
 E-mail: [sales@wcon.com](mailto:sales@wcon.com)      E-mail: [salesks@wcon.com](mailto:salesks@wcon.com)