







HSF

NOTES:
 Current Rating:10AMP
 Current Voltage:300V
 Withstand Voltage:2000V AC/minute
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40℃ to +105℃
 Wire Range:14-22AWG
 Screw Tightening Torsion:0.50N.m(5.1Kgf.cm).
 Screw Destroying Torsion:1.25N.m(12.5Kgf.cm) Min.

Contact Material:Copper Alloy
 Contact plating:See Ordering Information
 Screw/Nut material:C1018A, Plated: Ni 200u"Min
 Insulator Material:PBT,G.F,UL94V-0,Light Grey.

Recommended Process:
 Wave Soldering,Peak temperature:235±5℃

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)
 PCB BOARD THICKNESS:1.6~2.0

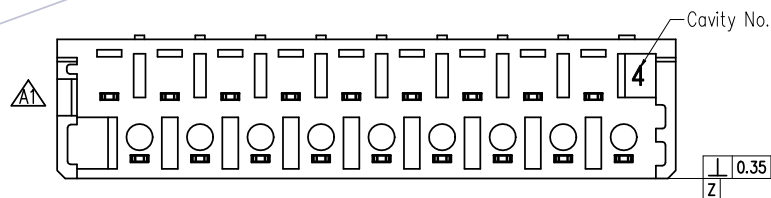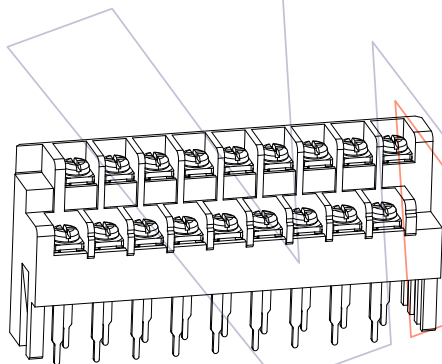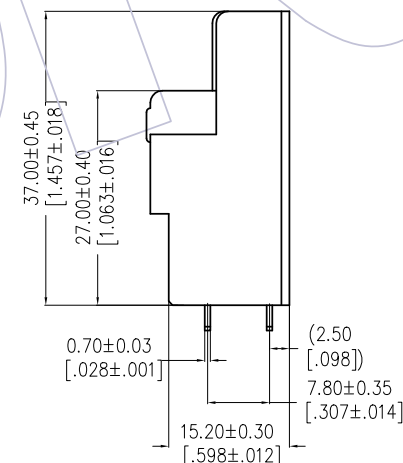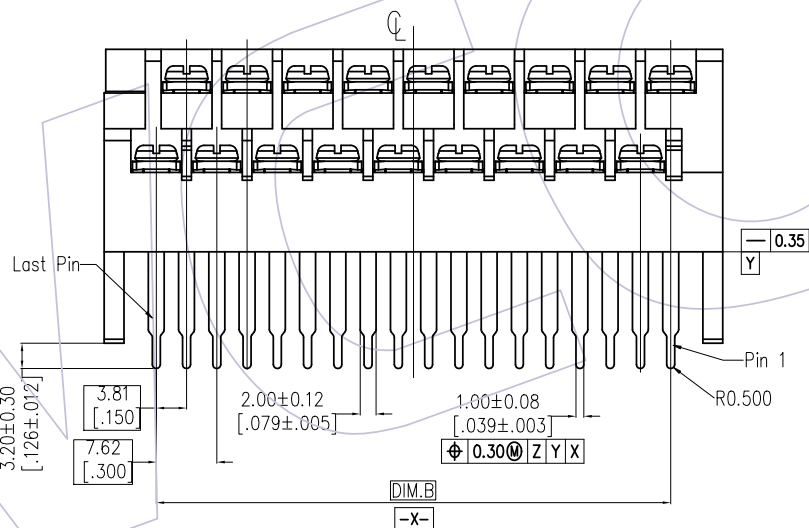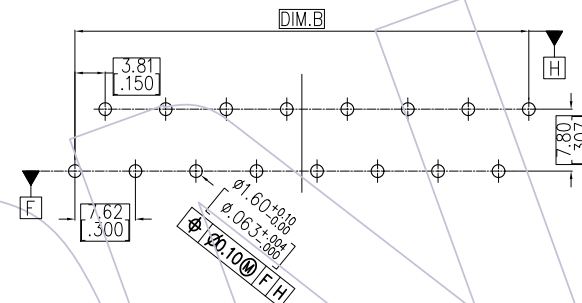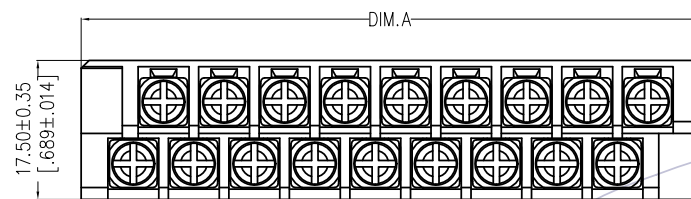

				OPERATION		DRAW Ken	DATE 2021/06/28	SCALE	FIT	PART NO. BH762-09-XX-T-SM-S01	 Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
				X.X	±0.40		CHECK	DATE	UNIT		
A1	2021/06/28	Modify the shape of Pin holes	Ken	X.XX	±0.25	APPROVE			DATE	SIZE	
A0	2020/12/17	NEW RELEASE	Ken	X.XXX	±0.15		SHEET	1/2			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	± 3°	DIM	TOL	PROJ.		Customer NO.	

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com

E-mail: salesks@wcon.com