
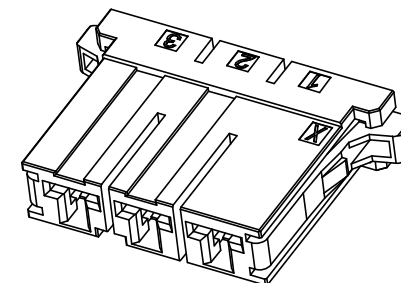


HSF

NOTES:

- 1.Voltage Rating: 730V AC/DC;
- 2.Withstand Voltage: 3000V AC;
- 3.Insulation Resistance: 1000MΩ Min;
- 4.Operating Temperature: -40°C to +125°C;
- 5.Insulator Material: PBT,UL94V-0,BK;

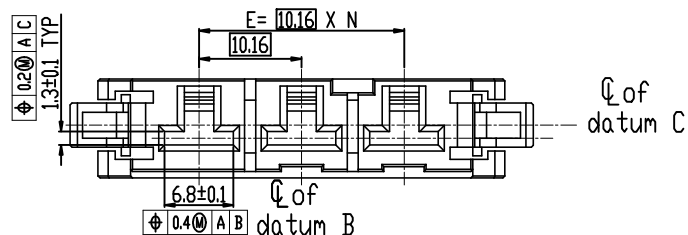

Ordering Information

WD10160-1 H XX B O OX X

1=Single Row

H=HOUSING






No.of Pins:
02=2P; 03=3P; 04=4P; 06=6P

Color:
B=Black

PACKING: PE Bag

CODE OF KEYING
01=X; 02=Y

Blank=Without "WCON" Logo
W=With "WCON" Logo

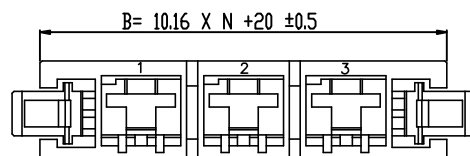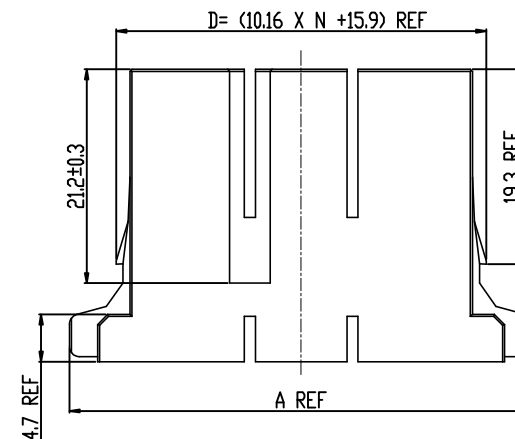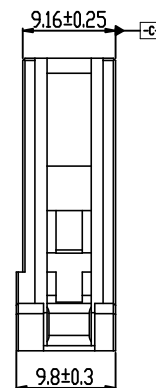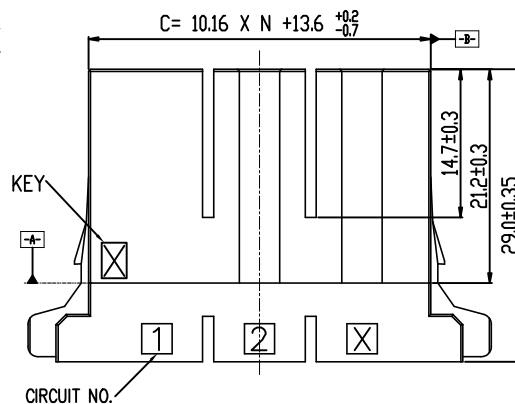

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW shi chun	DATE 2023. 04. 06	SCALE UNIT	FIT mm	PART NO. WD10160-1HXXB00XX	WCON Http: www.wcon.com	
				X.X	±0.40							
				X.XX	±0.25	CHECK	DATE	SIZE	A4	TITLE: 10.16mm DYNAMIC Type Single Row Housing	WCON-Dongguan	WCON-Kunshan
				X.XXX	±0.15	APPROVE	DATE	SHEET	1/3	Customer NO.	Tel: +86 769 85358920	Tel: +86 512 57468408
				Angle	± 3°			PROJ.	Φ		Fax: +86 769 85358915	Fax: +86 512 57468468
				DIM	TOL						E-mail: sales@wcon.com	E-mail: sales@wcon.com

HSF

NOTES:

- 1.Voltage Rating: 730V AC/DC;
- 2.Withstand Voltage: 3000V AC;
- 3.Insulation Resistance: 1000MΩ Min;
- 4.Operating Temperature: -40°C to +125°C;
- 5.Insulator Material: PBT,,UL94V-0,BK;

ALLOWED INCLINATION FOR A SECURE SELF-CENTERING

Ordering Information

WD10160-1 H XX B 0 0X X

1=Single Row

H=HOUSING


No.of Pins: 02=2P; 03=3P; 04=4P; 06=6P

Color: B=Black

PACKING: PE Bag

CODE OF KEYING
01=X; 02=Y

Blank=Without "WCON" Logo
W=With "WCON" Logo

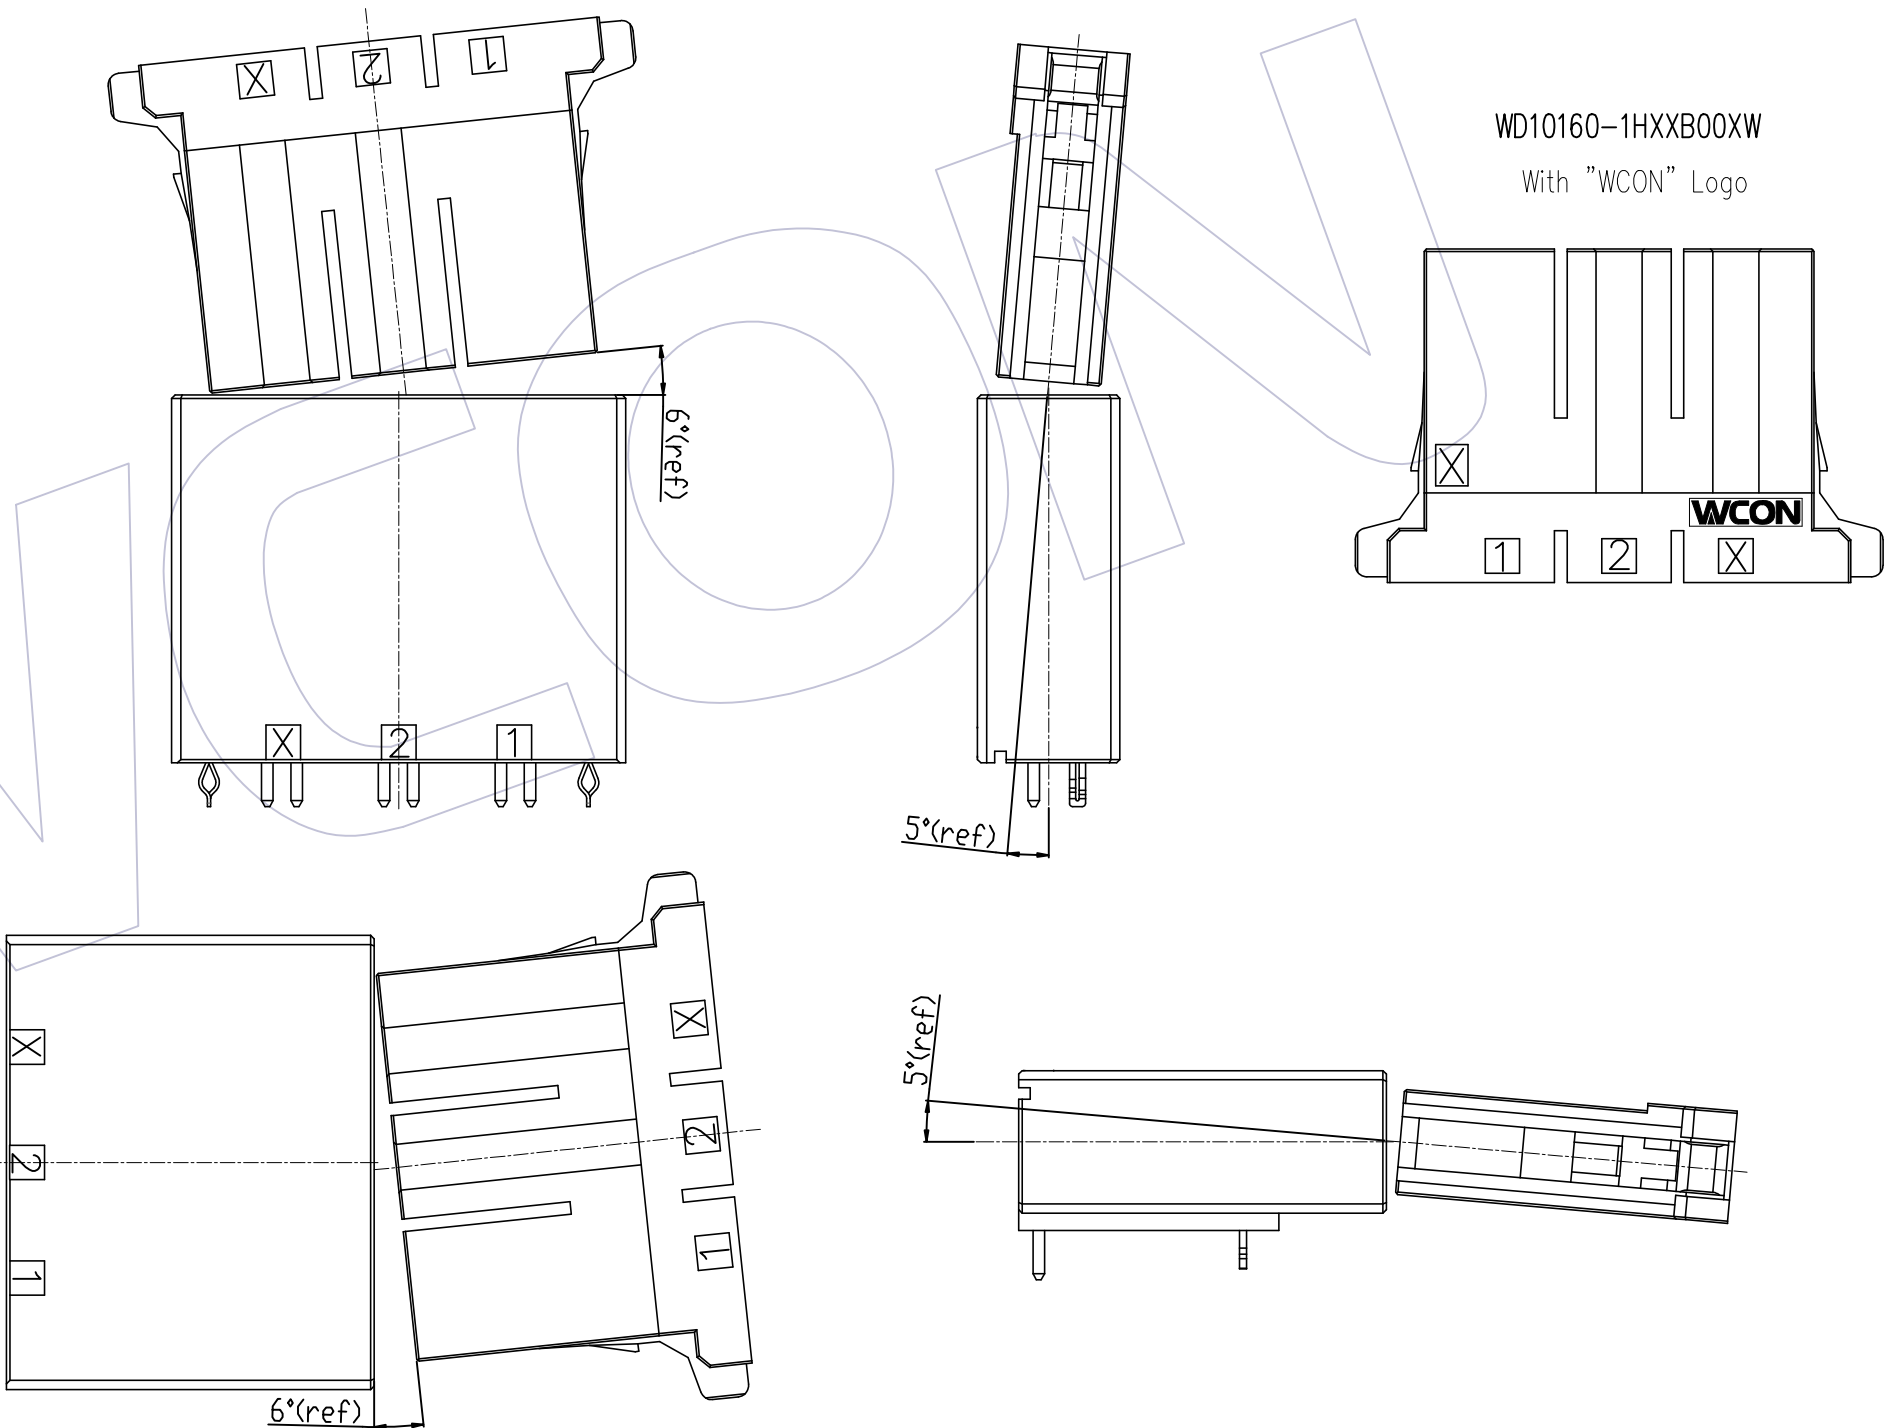

				OPERATION		DRAW shi chun	DATE 2023. 04. 06	SCALE	FIT	PART NO. WD10160-1HXXB00XX	WCON Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 769 85358915 Fax: +86 512 57468468 E-mail: sales@wcon.com E-mail: salesks@wcon.com	
				X.X	±0.40		CHECK	DATE	UNIT			
				X.XX	±0.25	SIZE			A4			
				X.XXX	±0.15	APPROVE	DATE	SHEET	2/3	Customer NO.		
1	2023. 04. 06	NEW	—	Angle	± 3°			PROJ.				
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL							

HSF

- NOTES:
- 1.Voltage Rating: 730V AC/DC;
 - 2.Withstand Voltage: 3000V AC;
 - 3.Insulation Resistance: 1000MΩ Min;
 - 4.Operating Temperature: -40℃ to +125℃;
 - 5.Insulator Material: PBT,UL94V-0,BK;

Ordering Information

WD10160-1 H XX B O OX X

1=Single Row

H=HOUSING






No.of Pins: 02=2P; 03=3P; 04=4P; 06=6P

Color: B=Black

PACKING:PE Bag

CODE OF KEYING
01=X; 02=Y

Blank=Without "WCON" Logo
W=With "WCON" Logo

PIN	N	A	B	C	D	E	F	料号	防呆代码	防呆示意图
2	1	35.76	30.16	23.76	26.06	10.16	19.28	WD10160-1H02B001X	X	
								WD10160-1H02B002X	Y	
3	2	45.92	40.32	33.92	36.22	20.32	29.44	WD10160-1H03B001X	X	
								WD10160-1H03B002X	Y	
4	3	53.68	50.48	44.08	46.38	30.48	39.62	WD10160-1H04B001X	X	
								WD10160-1H04B002X	Y	
6	5	73.02	70.80	64.40	66.70	50.80	59.92	WD10160-1H06B001X	X	
								WD10160-1H06B002X	Y	

				OPERATION		DRAW	DATE	SCALE	FIT	PART NO. WD10160-1HXXB00XX	WCON Http: www.wcon.com	
				X.X	±0.40	shi chun	2023. 04. 06	UNIT	mm	TITLE: 10.16mm DYNAMIC Type Single Row Housing		
				X.XX	±0.25	CHECK	DATE	SIZE	A4			
				X.XXX	±0.15	APPROVE	DATE	SHEET	3/3			
1	2023. 04. 06	NEW	—	Angle	± 3°			SHEET	3/3			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			PROJ.		Customer NO.	WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com