

HSF

NOTES:


Rated Current: 5.0AMP
 Contact Resistance: 20mΩ max
 Withstand Voltage: 1000V AC/Minute
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -25°C to +85°C

Insulator Material: PA66 UL94V-0
 Used with: WF3963-T
 Mated with: WF3963-Wafer

Ordering Information

WF 3963 - H XX X 0 1

No. of pins Color
 02pin-20pin
 B=Beige
 W=White

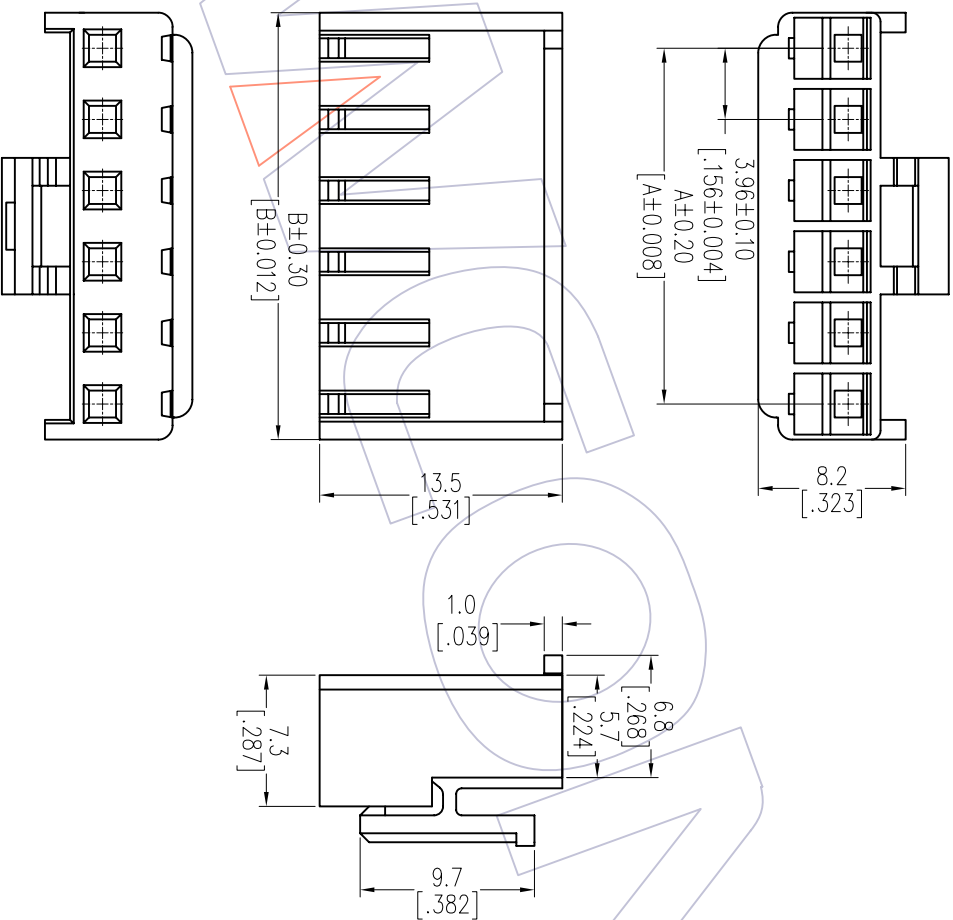

Specification & Ordering Information:

Circuit	Part No.	Dimension		Q'ty /Bag
		A	B	
02	WF3963-H02X01	3.96	7.92	1,000
03	WF3963-H03X01	7.92	11.88	1,000
04	WF3963-H04X01	11.88	15.84	1,000
05	WF3963-H05X01	15.84	19.80	1,000
06	WF3963-H06X01	19.80	23.76	500
07	WF3963-H07X01	23.76	27.72	500
08	WF3963-H08X01	27.72	31.68	500
09	WF3963-H09X01	31.68	35.64	500
10	WF3963-H10X01	35.64	39.60	500
11	WF3963-H11X01	39.60	43.56	500
12	WF3963-H12X01	43.56	47.52	500
13	WF3963-H13X01	47.52	51.48	500
14	WF3963-H14X01	51.48	55.44	500
15	WF3963-H15X01	55.44	59.40	500
16	WF3963-H16X01	59.40	63.36	500
17	WF3963-H17X01	63.36	67.32	500
18	WF3963-H18X01	67.32	71.28	500
19	WF3963-H19X01	71.28	75.24	500
20	WF3963-H20X01	75.24	79.20	500

OPERATION	SCALE	FIT	PART NO.
XX	UNIT	mm	WF3963-HXXX01
±0.40	mm	1/1	
DATE	CHECK	DATE	TITLE:
2012/09/15	JYHuang	2012/09/15	VH3.96 WAFER HOUSING
XX	±0.25	DATE	Customer NO.
XX	±0.15	DATE	
Angle	APPROVE	DATE	
± 3°			
±0.15			
CHANGE			
DESCRIPTION			
NEW			
DATE			
2012/09/15			
REV			
AO			

Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: sales@wcon.com