
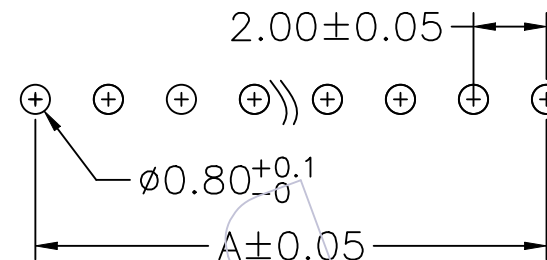


HSF

NOTES:
Rated Current:2A
Rated Voltage:250V AC/DC
Contact Resistance:20mΩ max
Withstand Voltage:800V AC/Minute
Insulation Resistance:1000MΩ min
Operation Temperature:-25℃ to+85℃
Material:PA66 UL94V-0

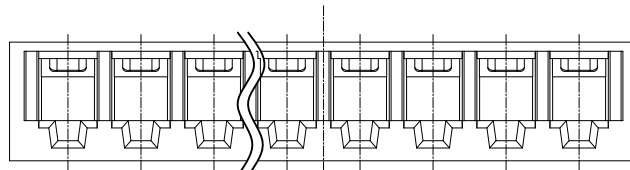

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Dimensional & Ordering Information

Circuit	Part No.	Dimension	
		A	B
02	WF2004-1H02X01	2.00	5.2
03	WF2004-1H03X01	4.00	7.2
04	WF2004-1H04X01	6.00	9.2
05	WF2004-1H05X01	8.00	11.2
06	WF2004-1H06X01	10.00	13.2
07	WF2004-1H07X01	12.00	15.2
08	WF2004-1H08X01	14.00	17.2
09	WF2004-1H09X01	16.00	19.2
10	WF2004-1H10X01	18.00	21.2
11	WF2004-1H11X01	20.00	23.2
12	WF2004-1H12X01	22.00	25.2
13	WF2004-1H13X01	24.00	27.2
14	WF2004-1H14X01	26.00	29.2
15	WF2004-1H15X01	28.00	31.2





Ordering Information

WF2004 - 1H XX X 0 1

No. of pins
02P~15P

Color
E=Beige
W=White
B=Black
N=Brown

Packing
0=PE Bag

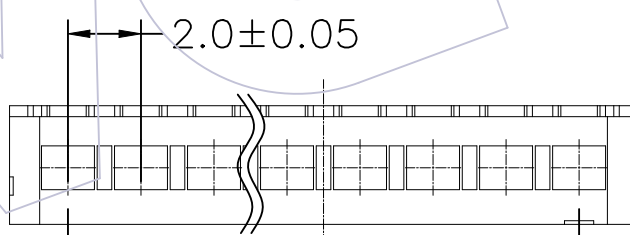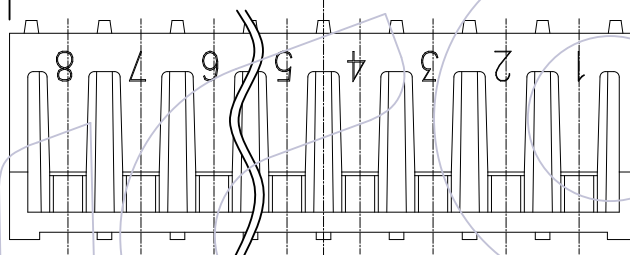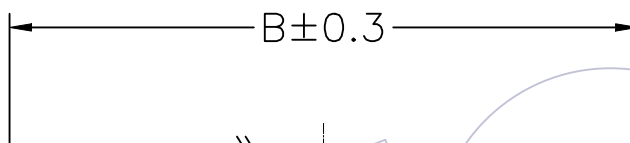

			OPERATION		DRAW LYTTON	DATE 2023. 08. 23	SCALE UNIT mm	FIT A4	PART NO. SEE TAB	WCON Http: www.wcon.com	
			X.X	±0.40							
			X.XX	±0.25	CHECK	DATE	SIZE A4	SHEET 1/1	TITLE: 2.0mm Housing J Type Single Row	WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	
			X.XXX	±0.15							
			Angle	± 3'	APPROVE	DATE	SHEET 1/1	PROJ.	Customer NO.	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com	
			DIM	TOL							
X0	2023. 08. 23	NEW									
REV	DATE	MODIFICATION DESCRIPTION		CHANGE							